




Revere
Transducers

HPSM Single Point, Stainless Steel Welded Seal IP67, Metric Envelope

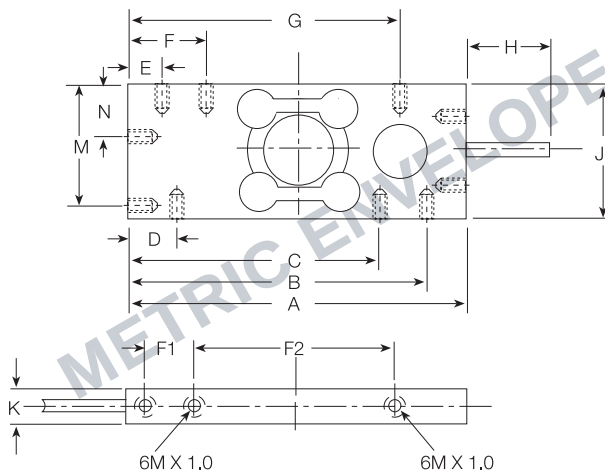

RATED CAPACITY	DIMENSIONS													
	A	B	C	D	E	F	F1	F2	G	H	J	K	M	N
kg/millimeters														
6.0	130.0	116.5	97.5	22.5	13.5	32.5	19.1	75.0	107.5	25.0	50.0	18.5	44.0	20.0
lb/inches														
13.2	5.1	4.5	3.8	.88	.53	1.2	.75	2.9	4.2	.98	1.9	.73	1.7	.78

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
Bridge Resistance: 350 ohms, nominal
Material/Finish: Stainless steel
Temperature: Compensated range
0°F to 150°F/-18°C to 65°C
Manufacturer: HPSM-D3-6kg-10P9
Model Number: 150% Full scale
Safe Overload: 10V AC/DC (15V maximum)
Rated Excitation:

Combined Error: 0.03% Full scale
Non-repeatability: 0.01% Full scale
Insulation Resistance: 5000 megohms
Seal Type: Welded seal, IP67
Cable Length: 20'/3.1m
Cable Color Code: Green + Excitation
Black - Excitation
White + Signal
Red - Signal
Warranty: 3 years

HPSM ORDER INFORMATION

Load Rating	Part #	Suggested List Price
6 kg (13.2 lb)	22334	\$595.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Sensortronics	(see page 299) 60064