




SSB Single-Ended Beam, Stainless Steel Welded Seal, IP67, NTEP 1:3000 Class III Single Cell

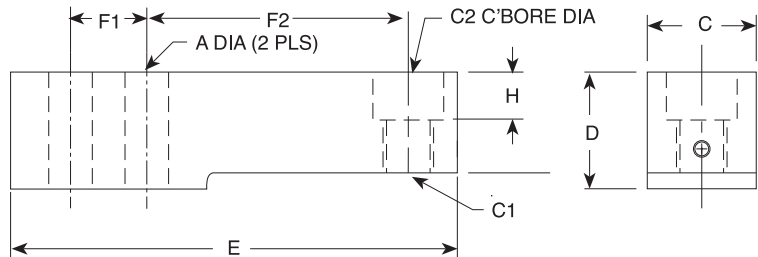

RATED CAPACITY	DIMENSIONS								
	A	C	C1	C2	D	E	F1	F2	H
lb/inches									
1000-5000	.53	1.44	.68	1.19	1.88	8.00	2.50	3.88	.47
10,000	.88	1.88	1.00	1.63	2.75	9.25	2.63	4.88	.62
kg/millimeters									
453.6-2268.0	13.5	36.6	17.3	30.2	47.8	203.2	63.5	98.6	11.9
4535.9	22.4	47.8	25.4	41.4	69.9	235.0	66.8	124.0	15.8

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C
Manufacturer	
Model Number:	SSB-A3-XX-15P5 (NTEP)
Safe Overload:	150% Full scale
Rated Excitation:	10V AC/DC (15V maximum)
Combined Error:	0.02% Full scale
Non-repeatability:	0.01% Full scale
Insulation Resistance:	5000 megohms

Deflection at Capacity:	1000-10,000 lb = .018"/.45mm,
Seal Type:	Welded seal*, IP67
Cable Length:	1000-10,000 lb = 15'/4.6m
Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Clear Shield
Warranty:	3 years

SSB ORDER INFORMATION

Load Rating	Part #	Suggested List Price
1000 lb (453.6 kg)	21538	\$600.00
2000 lb (907.2 kg)	21539	\$600.00
5000 lb (2268.0 kg)	21540	\$600.00
10,000 lb (4535.9 kg)	21541	\$715.00



INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 116) RLSSB
HBM	(see page 220) SB3

WEIGH MODULE AVAILABLE

Model	Page #
RL1900 Series	42

* NOTE: Conduit is recommended for maximum protection against the ingress of water and moisture through the cable entry.