




60008 Single Point, Alloy Steel, IP61

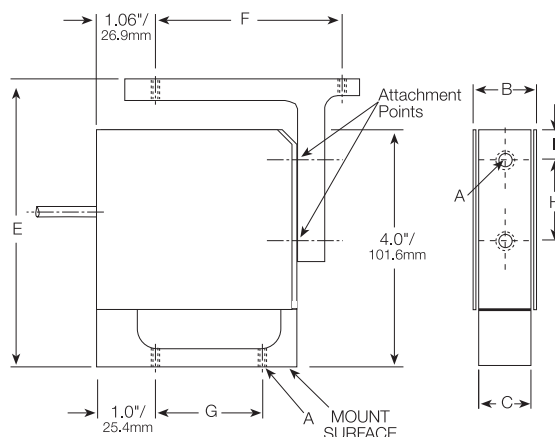

RATED CAPACITY	DIMENSIONS							
	A	B	C	E	F	G	H	I
lb/inches								
1-10	1/4-28 UNF	.62	.50	4.75	2.75	1.75	1.52	.65
20-50	1/4-28 UNF	.88	.75	4.75	2.75	1.75	1.52	.65
100	1/4-28 UNF	1.20	1.00	4.75	2.75	1.75	1.52	.65
kg/millimeters								
0.5-4.5	1/4-28 UNF	15.8	12.7	120.7	69.9	44.5	38.6	16.5
9.1-22.7	1/4-28 UNF	22.4	19.1	120.7	69.9	44.5	38.6	16.5
45.4	1/4-28 UNF	30.5	25.4	120.7	69.9	44.5	38.6	16.5

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	350 ohms, nominal	Deflection at Capacity:	1-2 lb = .023"/.58mm, 5-20 lb = .020"/.51mm
Material/Finish:	High-alloy steel, nickel plated	Seal Type:	Environmentally protected, IP61
Temperature:	Compensated range 0°F to 150°F/-18°C to 65°C	Max. Platform Size:	1-10 lb = 8" x 8"/203.2mm x 203.2mm; 20-100 lb = 12" x 12"/304.8mm x 304.8mm
Manufacturer		Cable Length:	10'/3.1m
Model Number:	60008	Cable Color Code:	Red + Excitation Black - Excitation Green + Signal White - Signal
Safe Overload:	150% Full scale	Warranty:	2 years
Rated Excitation:	10V DC (25V maximum)		
Nonlinearity:	0.03% Full scale		
Hysteresis:	0.02% Full scale		

60008 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
1 lb (0.5 kg)	17409	\$450.00
2 lb (0.9 kg)	17410	\$450.00
5 lb (2.3 kg)	17411	\$450.00
10 lb (4.5 kg)	17412	\$450.00
20 lb (9.1 kg)	17413	\$450.00
25 lb (11.3 kg)	17414	\$450.00
50 lb (22.7 kg)	17415	\$450.00
100 lb (45.4 kg)	17416	\$450.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Electroscale	905/910