




60030 Single-Ended Beam, Alloy Steel, IP65

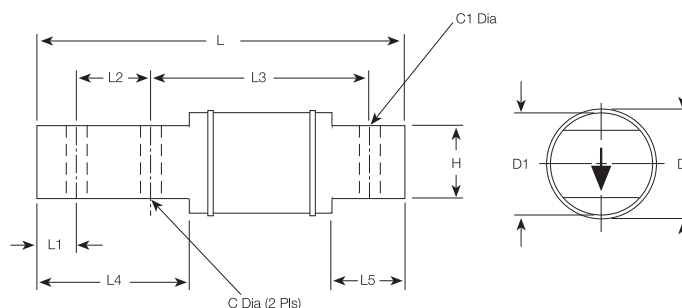

RATED CAPACITY	C	C1	D	D1	H	L	L1	L2	L3	L4	L5
lb/inches											
50-300	.26	.172	1.12	1.00	.62	3.75	.25	.50	2.75	1.00	.69
kg/millimeters											
22.7-136.1	6.6	4.4	28.5	25.4	15.8	95.3	6.4	12.7	69.9	25.4	17.5

SPECIFICATIONS:

Full Scale Output:	3.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	350 ohms, nominal	Seal Type:	Environmentally protected with a neoprene sleeve, IP65
Material/Finish:	High-alloy steel, nickel plated	Cable Length:	20'/6.1m
Temperature:	Compensated range 0°F to 150°F/-18°C to 65°C	Cable Color Code:	Red + Excitation Black - Excitation Green ... + Signal White - Signal
Manufacturer		Warranty:	2 years
Model Number:	60030		
Safe Overload:	150% Full scale		
Rated Excitation:	10V DC		
Nonlinearity:	0.04% Full scale		
Hysteresis:	0.02% Full scale		

60030 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
50 lb (22.7 kg)	17365	\$315.00
75 lb (34.0 kg)	17366	\$315.00
150 lb (68.0 kg)	17367	\$315.00
300 lb (136.1 kg)	17368	\$315.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Electroscale	LCB Bases