


60036 S-Beam, Alloy Steel, IP65



SPECIFICATIONS:

Full Scale Output:	3.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	High-alloy steel, nickel plated
Temperature:	Compensated range 0°F to 150°F/-18°C to 65°C
Manufacturer Model Number:	60036
Safe Overload:	150% Full scale
Rated Excitation:	10V DC (15V maximum)
Nonlinearity:	0.03% Full scale
Hysteresis:	0.03% Full scale
Insulation Resistance:	5000 megohms
Seal Type:	Environmentally protected with neoprene sleeve, IP65
Cable Length:	20'/6.1m
Cable Color Code:	Red + Excitation Black - Excitation Green ... + Signal White - Signal
Warranty:	2 years

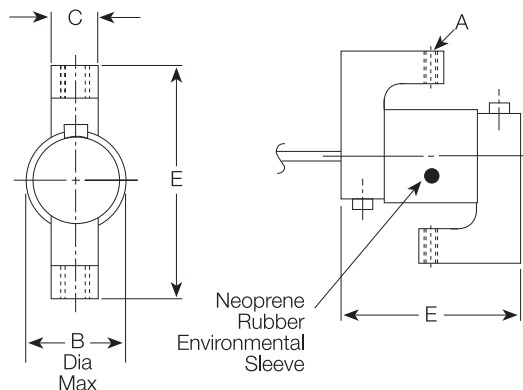

RATED CAPACITY	DIMENSIONS				
	A	B	C	D	E
lb/inches 25-150	1/4-28 UNF-2B	1.12	.50	2.12	2.50
kg/millimeters 11.3-68.0	1/4-28 UNF-2B	28.5	12.7	53.9	63.5

60036 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
25 lb (11.3 kg)	17038	\$315.00
50 lb (22.7 kg)	17039	\$315.00
75 lb (34.0 kg)	17040	\$315.00
100 lb (45.4 kg)	17041	\$315.00
150 lb (68.0 kg)	17042	\$315.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 97) RL20000
Celtron	(see page 176) STC
Revere Transducers	(see page 236) 9363

WEIGH MODULE AVAILABLE

Model	Page #
ITCM Isolated Tension Cell Mount	24-29, or 335