



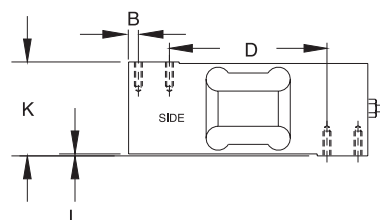

60060 Single Point, Aluminum, Clear Anodized, IP67

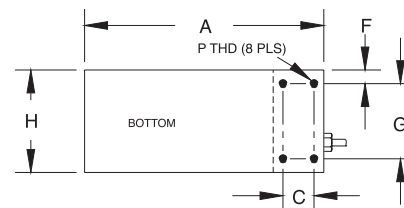

RATED CAPACITY	DIMENSIONS									
	A	B	C	D	F	G	H	K	L	P
lb/inches										
100-2000	7.50	.31	.98	4.92	.30	2.36	2.95	2.95	.06	5/16-18-2B X .75 DP
kg/millimeters										
45.4-907.2	190.5	7.9	25.0	125.0	7.6	60.0	75.0	75.0	1.5	5/16-18-2B X 19 DP

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	350 ohms, nominal	Deflection at Capacity:	250 lb = .010"/.25mm, 500-2000 lb = .006"/.15mm
Material/Finish:	Aluminum, clear anodized	Seal Type:	Environmentally protected, IP67
Temperature:	Compensated range 0°F to 150°F/-18°C to 65°C	Cable Length:	10'/3.1m
Manufacturer		Cable Color Code:	Red + Excitation Black - Excitation Green + Signal White - Signal
Model Number:	60060	Warranty:	2 years
Safe Overload:	150% Full scale		
Rated Excitation:	10V DC (20V maximum)		
Max. Platform Size:	30" x 30"/762mm x 762mm		
Combined Error:	0.02% Full scale		

60060 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
100 lb (45.4 kg)	36479	\$350.00
250 lb (113.4 kg)	17582	\$350.00
500 lb (226.8 kg)	17583	\$350.00
750 lb (340.2 kg)	17584	\$350.00
1000 lb (453.6 kg)	17585	\$350.00
2000 lb (907.2 kg)	17586	\$350.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Sensortronics	(see page 298) 60060-0101