



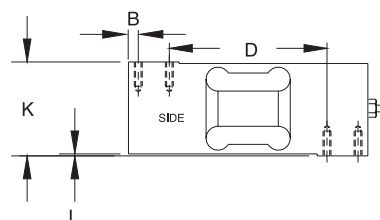

60060-0101 Single Point, Stainless Steel, IP67

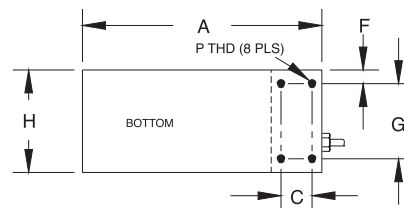

RATED CAPACITY	DIMENSIONS									
	A	B	C	D	F	G	H	K	L	P
lb/inches										
250-2000	7.50	.31	.98	4.92	.30	2.36	2.95	2.95	.06	5/16-18-2B X .75 DP
kg/millimeters										
113.4-907.2	190.5	7.9	25.0	125.0	7.6	60.0	75.0	75.0	1.5	5/16-18-2B X 19 DP

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
 Bridge Resistance: 350 ohms, nominal
 Material/Finish: Stainless steel
 Temperature: Compensated range
 0°F to 150°F/-18°C to 65°C
 Manufacturer
 Model Number: 60060-XX-0101
 Safe Overload: 150% Full scale
 Rated Excitation: 10V DC (20V maximum)
 Max. Platform Size: 30" x 30"/762mm x 762mm
 Combined Error: 0.02% Full scale

Insulation Resistance: 5000 megohms
 Deflection at Capacity: 250 lb = .010"/.25mm, 500-2000 lb = .006"/.15mm
 Seal Type: Environmentally protected, IP67
 Cable Length: 10'/3.1m
 Cable Color Code:
 Red + Excitation
 Black - Excitation
 Green + Signal
 White - Signal
 Warranty: 2 years

60060-0101 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
250 lb (113.4 kg)	36481	\$995.00
500 lb (226.8 kg)	36482	\$995.00
750 lb (340.2 kg)	36483	\$995.00
1000 lb (453.6 kg)	36484	\$995.00
2000 lb (907.2 kg)	36485	\$995.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Sensortronics	(see page 297) 60060