

60063 S-Beam, Stainless Steel Welded Seal, IP67 1:5000 Class III, 1:10,000 Class IIIL Single Cell




SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
Bridge Resistance: 350 ohms, nominal
Material/Finish: Stainless steel
Temperature: Compensated range
0°F to 150°F/-18°C to 65°C

Manufacturer
Model Number: 60063
Safe Overload: 150% Full scale
Rated Excitation: 10V DC (15V maximum)
Nonlinearity: 0.03% Full scale
Hysteresis: 0.02% Full scale
Insulation Resistance: 5000 megohms
Seal Type: Welded seal, IP67
Cable Length: 20'/6.1m
Cable Color Code:
Red + Excitation
Black - Excitation
Green ... + Signal
White - Signal

Warranty: 2 years

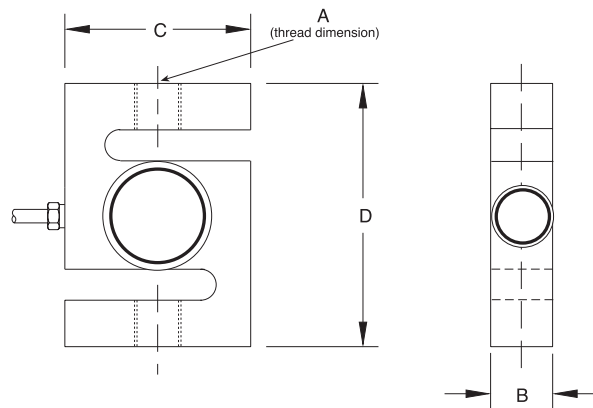

RATED CAPACITY

lb/inches

500-3000
5000-10,000
15,000
20,000

A

1/2-20
3/4-16
1-14
1 1/4-12

DIMENSIONS

B

1.00
1.00
1.25
2.00

C

2.00
3.50
4.00
5.00

D

3.00
4.75
5.50
7.00

kg/millimeters

226.8-1360.8
2268.0-4535.9
6803.9
9071.9

1/2-20

3/4-16

1-14

1 1/4-12

25.4

25.4

31.8

76.2

50.8

88.9

101.6

127.0

76.2

120.7

139.7

177.8

60063 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
NTEP cells:		
500 lb (226.8 kg)	36272	\$495.00
750 lb (340.2 kg)	36273	\$495.00
1000 lb (453.6 kg)	36274	\$495.00
1500 lb (680.4 kg)	36275	\$495.00
2000 lb (907.2 kg)	36276	\$495.00
2500 lb (1134.0 kg)	36277	\$495.00
3000 lb (1360.8 kg)	36278	\$495.00
5000 lb (2268.0 kg)	36279	\$660.00
Non-NTEP cells:		
10,000 lb (4535.9 kg)	36280	\$660.00
15,000 lb (6803.9 kg)	36281	\$895.00
20,000 lb (9071.9 kg)	36282	\$1,025.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 100) RL20001 HE

WEIGH MODULE AVAILABLE

Model	Page #
ITCM Isolated Tension Cell Mount	24-29, or 335