




60064 Single Point, Stainless Steel Welded Seal, IP67

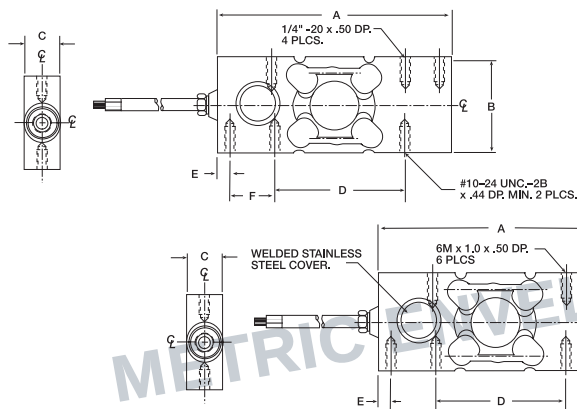

RATED CAPACITY	DIMENSIONS					
	A	B	C	D	E	F
lb/inches						
13.2-50	5.00	1.99	.72	3.00	.25	.75
100-132.3	5.00	1.99	.94	3.00	.25	.75
kg/millimeters						
6.0-22.7	127.0	50.4	18.3	76.2	6.4	19.1
45.4-60.0	127.0	50.4	23.9	76.2	6.4	19.1

SPECIFICATIONS:

Full Scale Output:	3.0 mV/V (lb) 2.0 mV/V (kg)
Bridge Resistance:	400 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Compensated range 0°F to 150°F/-18°C to 65°C
Manufacturer	
Model Number:	60064
Safe Overload:	150% Full scale
Rated Excitation:	10V AC/DC (15V maximum)

Combined Error:	0.03% Full scale
Non-repeatability:	0.01% Full scale
Insulation Resistance:	5000 megohms
Seal Type:	Welded seal, IP67
Cable Length:	10'/3m
Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal
Warranty:	2 years

60064 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
Metric Capacities:		
6 kg (13.2 lb)	41128	\$615.00
15 kg (33.1 lb)	41129	\$615.00
60 kg (132.3 lb)	41130	\$780.00
Capacities:		
25 lb (11.3 kg)	41125	\$615.00
50 lb (22.7 kg)	41126	\$615.00
100 lb (45.4 kg)	41127	\$780.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Avoirdupois:	
Revere Transducers	(see page 263) HPS
Metric Capacities:	
Revere Transducers	(see page 264) HPSM