




65007 Single-Ended Beam, Alloy Steel, IP67

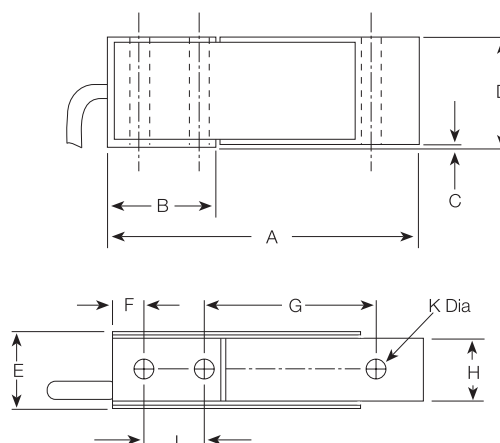

RATED CAPACITY

lb/inches
25-250

A	B	C	D	E	F	G	H	J	K
2.38	.90	.03	1.00	.63	.25	1.31	.50	.50	.171

kg/millimeters
11.3-113.4

60.5	22.9	.76	25.4	16.0	6.4	33.3	12.7	12.7	4.3
------	------	-----	------	------	-----	------	------	------	-----

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V
 Bridge Resistance: 350 ohms, nominal
 Material/Finish: High-alloy steel, nickel plated
 Temperature: Compensated range
 0°F to 150°F/-18°C to 65°C
 Manufacturer: Sensortronics
 Model Number: 65007
 Safe Overload: 150% Full scale
 Rated Excitation: 10V DC
 Nonlinearity: 0.03% Full scale

Hysteresis: 0.02% Full scale
 Insulation Resistance: 5000 megohms
 Seal Type: Environmentally protected, IP67
 Cable Length: 20'/6.1m
 Cable Color Code: Red + Excitation
 Black - Excitation
 Green ... + Signal
 White - Signal
 Warranty: 2 years

65007 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
25 lb (11.3 kg)	30158	\$250.00
50 lb (22.7 kg)	30159	\$250.00
75 lb (34.0 kg)	30160	\$250.00
150 lb (68.0 kg)	17457	\$250.00
250 lb (113.4 kg)	17458	\$250.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Celtron	(see page 180) MBB
Interface®	MB
Revere Transducers	CBU