




65016W Double-Ended Beam, Stainless Steel Welded Seal, IP67

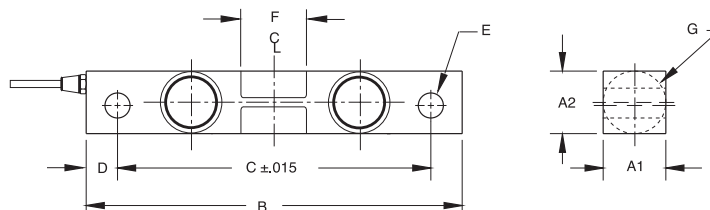

RATED CAPACITY	DIMENSIONS								CONDUIT ADAPTER
	A1	A2	B	C	D	E	F	G	
lb/inches									
1000-5000	1.22	1.22	7.50	6.25	.62	.50	1.12	1.25	1/4-18NPT
10,000-25,000	1.44	1.94	8.75	7.50	.62	.81	1.62	1.99	1/4-18NPT
50,000-75,000	2.44	2.94	13.50	11.50	1.00	1.31	3.25	2.99	1/2-14NPT
kg/millimeters									
453.6-2268.0	31.0	31.0	190.5	158.8	15.7	12.7	28.4	31.8	1/4-18NPT
4535.9-11,339.8	36.6	49.3	222.3	190.5	15.7	20.6	41.1	50.5	1/4-18NPT
15,876.0	36.6	62.0	222.3	190.5	15.7	20.6	41.1	63.5	1/4-18NPT
22,679.6-34,019.4	62.0	74.7	342.9	292.1	25.4	33.3	82.6	75.9	1/2-14NPT

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V nominal
Bridge Resistance: 700 ohms, nominal
Material/Finish: Stainless steel
Temperature: Compensated range
0°F to 150°F/-18°C to 65°C

Manufacturer
Model Number: 65016W-XX-0104W
Safe Overload: 150% Full scale
Rated Excitation: 10V AC/DC (25V maximum)

Nonlinearity: 0.03% Full scale
Hysteresis: 0.02% Full scale
Insulation Resistance: 5000 megohms
Seal Type: Welded seal, IP67
Cable Length: 25'/7.6m
Cable Color Code: Red + Excitation
Black - Excitation
Green ... + Signal
White - Signal

Warranty: 2 years

65016W ORDER INFORMATION

Load Rating	Part #	Suggested List Price
1000 lb (453.6 kg)	36295	\$595.00
1500 lb (680.4 kg)	36296	\$595.00
2000 lb (907.2 kg)	36297	\$595.00
2500 lb (1134.0 kg)	36298	\$595.00
5000 lb (2268.0 kg)	36299	\$595.00
10,000 lb (4535.9 kg)	36300	\$675.00
15,000 lb (6803.9 kg)	36301	\$675.00
20,000 lb (9071.9 kg)	36302	\$675.00
25,000 lb (11,339.8 kg)	36303	\$675.00
50,000 lb (22,679.6 kg)	36304	\$1,150.00
75,000 lb (34,019.4 kg)	36305	\$1,150.00

NOTE: 75,000 lb capacity has a square center.

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 139) RL75016HE

WEIGH MODULE AVAILABLE

Model	Page #
RL1600 Series	58-64