





65016WH Double-Ended Beam, Stainless Steel Hermetically Sealed, IP68

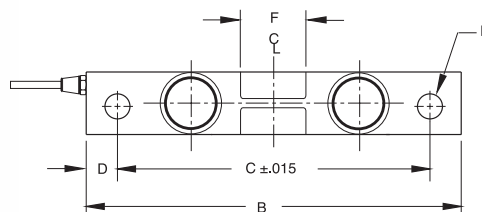

RATED CAPACITY	A1	A2	B	C	D	E	F	G	CONDUIT ADAPTER
lb/inches									
1000-5000	1.22	1.22	7.50	6.25	.62	.50	1.12	1.25	1/2-14 NPT
10,000-25,000	1.44	1.94	8.75	7.50	.62	.81	1.62	1.99	1/2-14 NPT
50,000-75,000	2.44	2.94	13.50	11.50	1.00	1.31	3.25	2.99	1/2-14 NPT
kg/millimeters									
453.6-2268.0	31.0	31.0	190.5	158.8	15.7	12.7	28.4	31.8	
4535.9-11,339.8	36.6	49.3	222.3	190.5	15.7	20.6	41.1	50.5	
15,876.0	36.6	62.0	222.3	190.5	15.7	20.6	41.1	63.5	
22,679.6-34,019.4	62.0	74.7	342.9	292.1	25.4	33.3	82.6	75.9	

SPECIFICATIONS:

Full Scale Output:	3.0 mV/V nominal	Nonlinearity:	0.03% Full scale
Bridge Resistance:	700 ohms, nominal	Hysteresis:	0.02% Full scale
Material/Finish:	Stainless steel	Insulation Resistance:	5000 megohms
Temperature:	Compensated range 0°F to 150°F/-18°C to 65°C	Seal Type:	Hermetically seal, IP68
Manufacturer		Cable Length:	25'/7.6m
Model Number:	65016W-XX-0104WH	Cable Color Code:	Red + Excitation Black - Excitation Green ... + Signal White - Signal
Safe Overload:	150% Full scale	Warranty:	2 years
Rated Excitation:	10V AC/DC (25V maximum)		

65016W ORDER INFORMATION

Load Rating	Part #	Suggested List Price
1000 lb (453.6 kg)	65827	\$675.00
1500 lb (680.4 kg)	65828	\$675.00
2000 lb (907.2 kg)	65829	\$675.00
2500 lb (1134.0 kg)	65830	\$675.00
5000 lb (2268.0 kg)	65831	\$675.00
10,000 lb (4535.9 kg)	65832	\$755.00
15,000 lb (6803.9 kg)	65833	\$755.00
20,000 lb (9071.9 kg)	65834	\$755.00
25,000 lb (11,339.8 kg)	65835	\$755.00
50,000 lb (22,679.6 kg)	65836	\$1,150.00
75,000 lb (34,019.4 kg)	65837	\$1,150.00

NOTE: 75,000 lb capacity has a square center.

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 139) RL75016HE
Sensortronics	65016W

WEIGH MODULE AVAILABLE

Model	Page #
RL1600 Series	58-64