




65040A Double-Ended Beam, Alloy Steel NTEP 1:6000/1:10,000 Class IIIL Multiple Cell, IP67

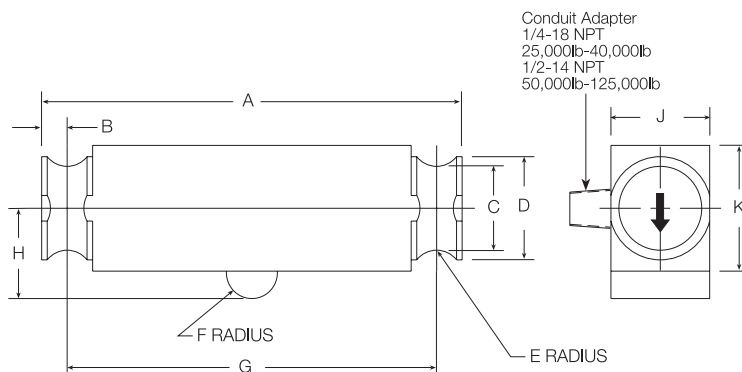

RATED CAPACITY	A	B	C	D	E	F	G	H	J	K
lb/inches										
25,000-50,000SE	8.25	.50	1.63	2.00	.50	.50	7.25	1.75	1.94	2.44
50,000-75,000	11.50	.75	1.70	2.20	.75	1.00	10.00	2.00	1.94	2.94
100,000-125,000	14.50	1.00	2.44	3.20	1.00	1.50	12.50	2.75	2.90	3.86
kg/millimeters										
11,339.8-22,679.6SE	209.6	12.7	41.4	50.8	12.7	12.7	184.2	44.5	49.3	62.0
22,679.6-34,019.4	292.1	19.1	43.2	55.9	19.1	25.4	254.0	50.8	49.3	74.7
45,359.2-56,699.1	368.3	25.4	62.0	81.3	25.4	38.1	317.5	69.9	73.7	98.0

SPECIFICATIONS:

Full Scale Output:	3.0 mV/V
Bridge Resistance:	700 ohms, nominal
Material/Finish:	High-alloy steel, nickel plated
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C
Manufacturer	
Model Number:	65040A-XX-6000 (1:6000) 65040A-XX-1000 (1:10,000)
Safe Overload:	150% Full scale
Rated Excitation:	10V DC (25V maximum)

Nonlinearity:	0.03% Full scale
Hysteresis:	0.02% Full scale
Insulation Resistance:	5000 megohms
Seal Type:	Welded seal, IP67
Cable Length:	35'/10.6m
Cable Coloring:	Red + Excitation Black - Excitation Green ... + Signal White - Signal
Warranty:	2 years

65040A ORDER INFORMATION

Load Rating	Part #	Suggested List Price
NTEP 1:6000		
25,000 lb (11,339.8 kg)	21576	\$615.00
40,000 lb (18,143.7 kg)	21577	\$740.00
50,000 lb (22,679.6 kg)	21578	\$815.00
60,000 lb (27,215.3 kg)	21579	\$815.00
75,000 lb (34,019.4 kg)	21580	\$815.00
100,000 lb (45,359.2 kg)	21581	\$1,555.00
125,000 lb (56,699.1 kg)	21582	\$1,555.00
NTEP 1:10,000		
25,000 lb (11,339.8 kg)	21598	\$635.00
40,000 lb (18,143.7 kg)	21599	\$760.00
50,000SE lb (22,679.6 kg)	66080	\$760.00
50,000 lb (22,679.6 kg)	21600	\$835.00
60,000 lb (27,215.3 kg)	21601	\$835.00
75,000 lb (34,019.4 kg)	21602	\$835.00
100,000 lb (45,359.2 kg)	21603	\$1,575.00
125,000 lb (56,699.1 kg)	21604	\$1,575.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 138) RL75040A
Thurman®	TSC 840
Celtron	(see page 183) DLB

WEIGH MODULE AVAILABLE

Model	Page #
Translink™	78

Thurman is a registered trademark of Thurman Scale Co.

USA: 800-472-6703 • Canada/Mexico: 800-321-6703 • International: 715-234-9171

Prices & Specifications subject to change without notice