




65040 S Double-Ended Beam, Stainless Steel Welded Seal, NTEP 1:10,000 Class IIIL Multiple Cell, IP67

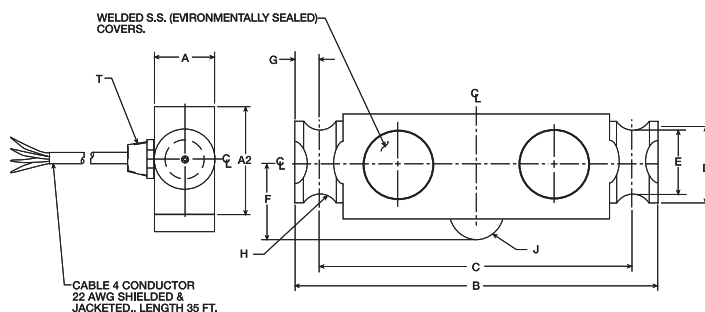

RATED CAPACITY	DIMENSIONS										
	A	A2	B	C	D	E	F	G	H	J	T
lb/inches											
25,000-40,000	1.94	2.44	8.25	7.25	2.00	1.63	1.75	.50	.50	.50	1/4-18 NPT
50,000-75,000	1.94	2.94	11.50	10.00	2.20	1.70	2.00	.75	.75	1.00	1/4-18 NPT
kg/millimeters											
11,340-18,144	49.2	62.0	209.6	184.2	50.8	41.4	44.5	12.7	12.7	12.7	1/4-18 NPT
22,680-34,020	49.2	74.7	292.1	254.0	55.9	43.2	50.8	19.1	19.1	25.4	1/4-18 NPT

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V
Bridge Resistance: 700 ohms, nominal
Material/Finish: Stainless steel
Temperature: Compensated range
14°F to 104°F/-10°C to 40°C
Mfr. Model Number: 65040S-XX-1123W
Safe Overload: 150% Full scale
Rated Excitation: 10V DC (25V maximum)
Nonlinearity: 0.03% Full scale

Hysteresis: 0.02% Full scale
Insulation Resistance: 5000 megohms
Seal Type: Hermetically sealed, IP67
Cable Length: 35'/10.6m
Cable Coloring: Red + Excitation
Black - Excitation
Green ... + Signal
White - Signal
Warranty: 2 years

65040 S ORDER INFORMATION

Load Rating	Part #	Suggested List Price
25,000 lb (11,339.8 kg)	45467	\$765.00
40,000 lb (18,143.7 kg)	45468	\$915.00
50,000 lb (22,679.6 kg)	45469	\$995.00
60,000 lb (27,215.5 kg)	45470	\$995.00
75,000 lb (34,019.4 kg)	45471	\$995.00
100,000 lb (45,359.4 kg)	45472	\$1,890.00
125,000 lb (56,699.1 kg)	45473	\$1,890.00
200,000 lb (90,720 kg)	45474	\$3,780.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 140) RL75040A
Sensortronics	(see page 289) 65040A