




65058 S Double-Ended Beam, Stainless Steel Welded Seal, NTEP 1:10,000 Class IIIL Multiple Cell, IP67

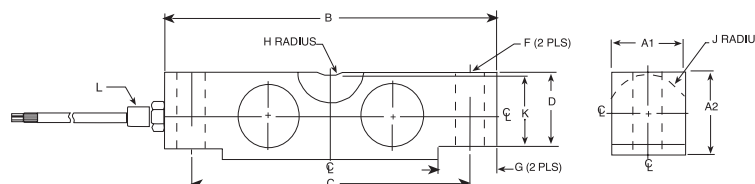

RATED CAPACITY	A	A2	B	C	D	F	G	H	J	K	L
lb/inches											
20,000-25,000	1.69	1.94	7.75	6.50	1.70	.68	1.38	.75	.90	1.63	1/4-18NPT
35,000-75,000	2.44	2.94	10.25	8.50	2.65	1.06	1.93	1.00	1.37	2.54	1/2-14NPT
100,000	2.44	3.44	10.25	8.50	2.65	1.06	1.93	1.00	1.37	2.54	1/2-14NPT
kg/millimeters											
9072-11340	43.0	49.3	196.9	165.1	43.2	17.3	35.1	19.1	22.9	41.4	1/4-18NPT
15876-34020	62.0	74.7	260.4	216.0	67.3	27.0	49.0	25.4	34.8	64.5	1/2-14NPT
45360	62.0	87.4	260.4	216.0	67.3	27.0	49.0	25.4	34.8	64.5	1/2-14NPT

SPECIFICATIONS:

Full Scale Output:	3.0 mV/V
Bridge Resistance:	700 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C
Manufacturer	
Model Number:	65058S-XX-1000W
Safe Overload:	150% Full scale
Rated Excitation:	10V DC (25V maximum)
Nonlinearity:	0.03% Full scale

Hysteresis:	0.02% Full scale
Insulation Resistance:	5000 ohms
Seal Type:	Hermetically sealed, IP67
Cable Length:	35'/10.6m
Cable Coloring:	Red + Excitation Black - Excitation Green ... + Output White - Output
Warranty:	2 years

65058 S ORDER INFORMATION

Load Rating	Part #	Suggested List Price
35 ft Cables		
20,000 lb (9,072 kg)	45475	\$765.00
25,000 lb (11,339.8 kg)	45476	\$765.00
40,000 lb (18,143.7 kg)	45477	\$915.00
50,000 lb (22,679.6 kg)	45478	\$995.00
60,000 lb (27,215.3 kg)	45479	\$995.00
75,000 lb (34,019.4 kg)	45480	\$995.00
100,000 lb (45,359.2 kg)	45481	\$1,890.00
125,000 lb (56,699.1 kg)	45482	\$1,890.00
200,000 lb (90,720 kg)	45483	\$3,780.00
60 ft Cable		
75,000 lb (34,019.4 kg)	48698	\$1,235.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 137) RL75058
Sensortronics	(see page 286) 65058