




65061A Double-Ended Beam, Alloy Steel NTEP 1:10,000 Class IIIL Multiple Cell, IP67

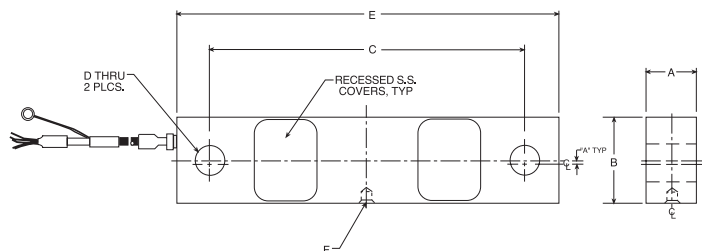

RATED CAPACITY

lb/inches
40,000
50,000

A

B

C

DIMENSIONS

D

E

F

kg/millimeters

18,143.7
22,679.6

49.3
49.3

62.0
74.7

222.3
222.3

45.2
27.0

266.7
266.7

6.5 X 9.5 DP
6.5 X 9.5 DP

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V
Bridge Resistance: 700 ohms, nominal
Material/Finish: High-alloy steel, nickel plated
Temperature: Compensated range
14°F to 104°F/-10°C to 40°C
Mfr. Model Number: 65061A-XX-1108 (Rodent cable)
Safe Overload: 150% Full scale
Rated Excitation: 10V DC (25V maximum)
Nonlinearity: 0.03% Full scale

Hysteresis: 0.02% Full scale
Insulation Resistance: 5000 ohms
Seal Type: Welded seal, IP67
Cable Length: 60'/18.2m stainless steel overbraid
Cable Coloring: Red + Excitation
Black - Excitation
Green ... + Signal
White - Signal
Warranty: 2 years

65061A ORDER INFORMATION

Load Rating	Part #	Suggested List Price
40,000 lb (18,143.7 kg)	47850	\$1,330.00
50,000 lb (22,679.6 kg)	47851	\$1,330.00

Mounting Assembly Accessories

Load Button	25524	\$35.00
Load Pin	50807	\$67.00
Bearing Screw	44837	\$99.00
Bushing	50748	\$27.00
Load Cell Stand	50767	\$186.00
Support Pin	50747	\$24.00
Washer	10816	\$2.30
Cotter Pin	15244	\$1.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Fairbanks®	Rodan 91088