


65114 Rocker Column, Stainless Steel

Hermetically Sealed IP68, NTEP 1:10,000

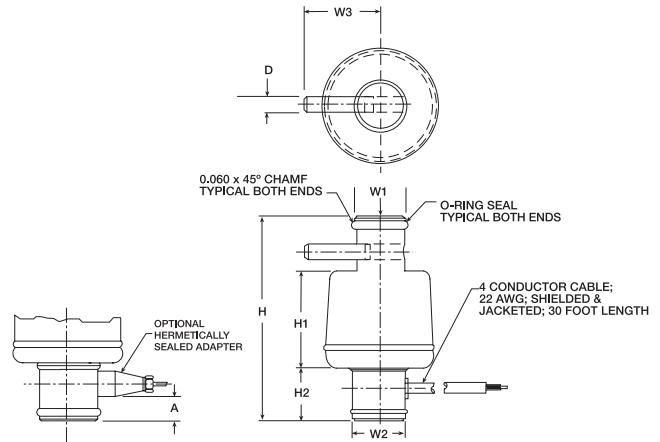

RATED CAPACITY	DIMENSIONS							
	A	D	H	H1	H2	W1	W2	W3
lb/inches								
50,000	.62	.38	6.00	2.82	1.59	1.46	1.46	2.18 ± .06
50,000LE	.62	.38	7.56	2.82	1.59	1.46	1.46	2.18 ± .06
100,000	.62	.38	8.86	2.82	1.59	1.46	1.46	2.18 ± .06
kg/millimeters								
22,680.0	15.6	9.7	152.4	71.6	40.4	37.08	37.1	55.4 ± 1.5
22,680.0	15.6	9.7	192.0	71.6	40.4	37.08	37.1	55.4 ± 1.5
45,360.0	15.6	9.7	225.0	71.6	40.4	37.08	37.1	55.4 ± 1.5

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V nominal	Combined Error:	0.03% Full scale
Bridge Resistance:	1000 Ohms	Insulation Resistance:	1000 megohms
Material/Finish:	Stainless steel	Seal Type:	Hermetically sealed, IP68
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Length:	35'/10.6m
Manufacturer		Cable Color Code:	Red + Excitation Black - Excitation Green + Signal White - Signal
Model Number:	65114SXX-1000H	Warranty:	2 years
Safe Overload:	150% Full scale		
Rated Excitation:	5V AC/DC (25V maximum)		

65114 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
50,000 lb (22,680.0 kg)	46497	\$695.00
50,000LE lb (22,680.0 kg)	47952	\$695.00
100,000 lb (45,360.0 kg)	47953	\$1035.00