


1010 Potted & Unpotted Single Point, Aluminum NTEP 1:5000 Class III Single Cell

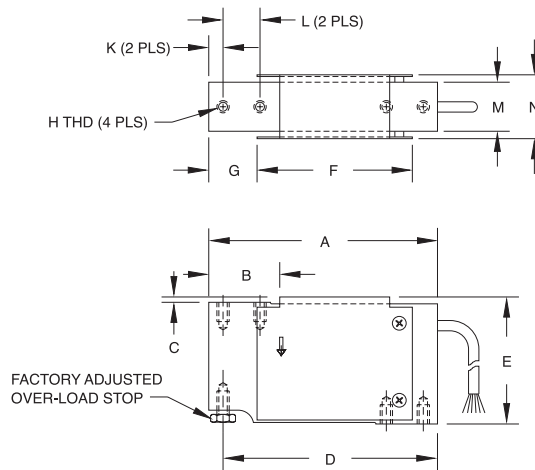

RATED CAPACITY	DIMENSIONS												
	A	B	C	D	E	F	G	H	K	L	M	N	
kg/millimeters 3-90	118.0	34.0	3.0	110.5	66.0	80.0	25.0	1/4-20 UNC X 13 DP	7.5	19.05	25.4	33.5	
lb/inches 6.6-198.4	4.65	1.34	.12	4.35	2.60	3.15	.98	1/4-20 UNC X 0.5 DP	.30	.75	1.00	1.32	

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
 Bridge Resistance: 350 ohms, nominal
 Material/Finish: Aluminum
 Temperature: Compensated range 14°F to 104°F/-10°C to 40°C
 Manufacturer Model Number: 1010-XXXX001 (NTEP) 1010-XXXX201 (Non-NTEP)
 Safe Overload: 200% at center of loading point, full scale
 Rated Excitation: 10V AC/DC (20V maximum)
 Total Error: 0.02% Full scale

Insulation Resistance: 5000 megohms
 Deflection at Capacity: 3-90 kg ≤ .4 mm/.015"
 Seal Type: Potted & Unpotted Models
 Cable Length: Potted cells: 10'/3.1 m Unpotted cells: 10'/3.1 m
 Cable Color Code: Green + Excitation Black - Excitation Blue + Sense Brown - Sense Red + Signal White - Signal
 Warranty: 2 years

1010 POTTED ORDER INFORMATION

Load Rating	Part #	Suggested List Price
Potted, NTEP 1:5000		
10 kg (22.1 lb)	33727	\$195.00
15 kg (33.1 lb)	33728	\$195.00
20 kg (44.1 lb)	33729	\$195.00
30 kg (66.1 lb)	33730	\$195.00
50 kg (110.2 lb)	33731	\$195.00

Load Rating	Part #	Suggested List Price
Potted, Non-NTEP		
3 kg (6.6 lb)	17481	\$195.00
5 kg (11.0 lb)	17462	\$195.00
7 kg (15.4 lb)	17463	\$195.00
10 kg (22.1 lb)	17464	\$195.00
15 kg (33.1 lb)	17465	\$195.00
20 kg (44.1 lb)	17482	\$195.00
30 kg (66.1 lb)	17475	\$195.00
50 kg (110.2 lb)	17476	\$195.00
90 kg (198.4 lb)	17471	\$195.00

1010 UNPOTTED ORDER INFORMATION

Load Rating	Part #	Suggested List Price
Unpotted, NTEP 1:5000		
5 kg (11.0 lb)	33732	\$180.00
7 kg (15.4 lb)	33733	\$180.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 143) RL1010