




1022 Single Point, Aluminum

NTEP 1:5000 Class III Single Cell



Available upon request

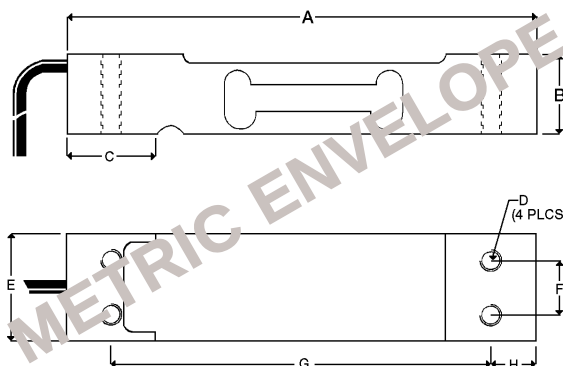

RATED CAPACITY	DIMENSIONS							
	A	B	C	D	E	F	G	H
kg/millimeters								
3-7	130.0	22.0	25.0	M6 x 1.0	25.4	15.0	106.0	12.0
10-30	130.0	22.0	25.0	M6 x 1.0	30.0	15.0	106.0	12.0
35	130.0	22.0	25.0	M6 x 1.0	40.0	15.0	106.0	12.0
lb/inches								
6.6-15.4	5.12	.87	.99	M6 x 1.0	1.00	.59	4.17	.47
22.0-66.2	5.12	.87	.99	M6 x 1.0	1.18	.59	4.17	.47
77.2	5.12	.87	.99	M6 x 1.0	1.57	.59	4.17	.47

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
Bridge Resistance: 350 ohms, nominal
Material/Finish: Anodized aluminum
Temperature: Compensated temperature range
14°F to 104°F/-10°C to 40°C
Manufacturer
Model Number: 1022-XXXX001
Safe Overload: 150% Full scale
Rated Excitation: 10V DC (15V maximum)
Total Error: 0.02% Full scale

Insulation Resistance: 2000 megohms
Seal Type: Environmentally protected
Cable Length: 0.5m/1.5'
Cable Color Code: Green + Excitation
Black - Excitation
Blue + Sense
Brown ... - Sense
Red + Signal
White - Signal
Warranty: 2 years

1022 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
3 kg (6.6 lb)	41135	\$165.00
5 kg (11.0 lb)	41136	\$165.00
7 kg (15.4 lb)	41137	\$165.00
10 kg (22.0 lb)	41138	\$165.00
15 kg (33.1 lb)	41139	\$165.00
20 kg (44.1 lb)	41140	\$165.00
30 kg (66.1 lb)	41141	\$165.00
35 kg (77.2 lb)	41142	\$165.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 144) RL1521A
Celtron	(see page 186) LPS
BLH	C2G1
Fairbanks	4900 Series Checkweigher
NMB	C2G1