


1030 Single Point, Aluminum OIML C2.5

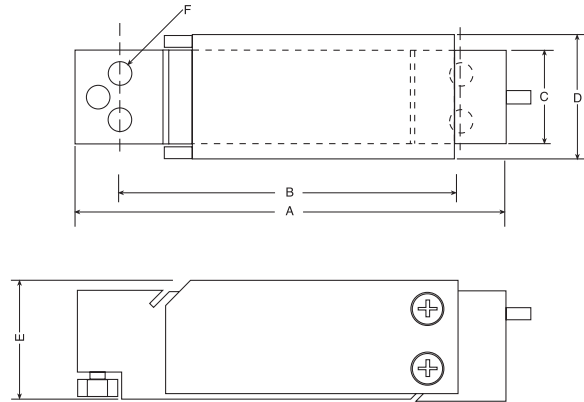

RATED CAPACITY	DIMENSIONS					
	A	B	C	D	E	F
kg/millimeters						
3-15	117.9	93.7	25.4	33.3	32.5	1/4-20 UNC X 10 DP
lb/inches						
6.6-33.1	4.64	3.69	1.00	1.31	1.28	1/4-20 UNC X 0.39 DP

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
Bridge Resistance: 350 ohms, nominal
Material/Finish: Anodized aluminum
Temperature: Compensated range
14°F to 104°F/-10°C to 40°C
Manufacturer
Model Number: 1030-XXXX101
Safe Overload: 150% Full scale
Rated Excitation: 10V DC/AC (20V maximum)
Total Error: 0.02%

Insulation Resistance: 5000 megohms
Deflection at Capacity: 3-15 kg = .015"/.4mm
Seal Type: Environmentally protected
Cable Length: 1m/3.3'
Cable Color Code:
Green + Excitation
Black - Excitation
Blue + Sense
Brown ... - Sense
Red + Signal
White - Signal
Warranty: 1 year

1030 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
3 kg (6.6 lb)	47882	\$265.00
5 kg (11.0 lb)	47883	\$265.00
7 kg (15.4 lb)	47884	\$265.00
10 kg (22.1 lb)	47885	\$265.00
15 kg (33.1 lb)	47886	\$265.00