




1130 Single Point, Stainless Steel



Pending

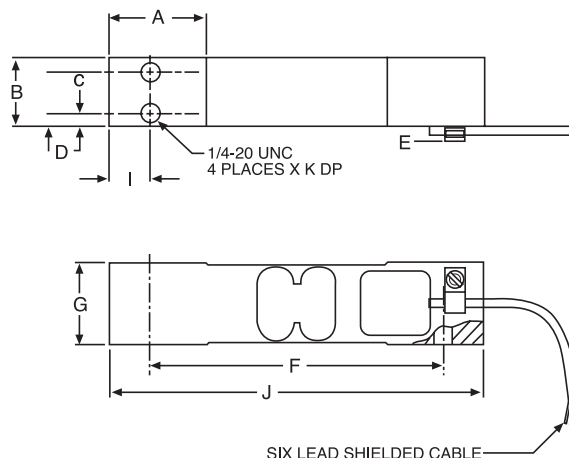

RATED CAPACITY	DIMENSIONS									
	A	B	C	D	E	F	G	I	J	H
kg/millimeters										
7.5-100	35.0	25.0	15.0	5.0	6.5	10.6	30	14.5	135	10
lb/inches										
16.6-220.5	1.378	.98	.591	.19	.26	4.173	1.18	.571	5.31	.39

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Seal Type:	Environmentally protected
Bridge Resistance:	350 ohms, nominal	Cable Length:	3.3'/1m 3.3'/1m
Material/Finish:	Stainless Steel	Cable Color Code:	Green + Excitation Black - Excitation Blue + Sense Brown ... - Sense Red + Signal White - Signal
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Warranty:	2 years
Safe Overload:	200% full scale, at center loading point		
Rated Excitation:	10V AC/DC (15V maximum)		
Total Error:	0.02% Full scale		
Insulation Resistance:	5000 megohms		
Deflection at Capacity:	7.5-100 kg ≤ .4mm/.015"		

1130 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
7.5 kg (16.6 lb)	53485	\$255.00
15 kg (33.1 lb)	53486	\$255.00
30 kg (66.1 lb)	53487	\$255.00
50 kg (110.2 lb)	53488	\$255.00
100 kg (220.0 lb)	53490	\$255.00

Matched-output cells are available; consult factory.

USA: 800-472-6703 • Canada/Mexico: 800-321-6703 • International: 715-234-9171