




1240 Single Point, Stainless Steel

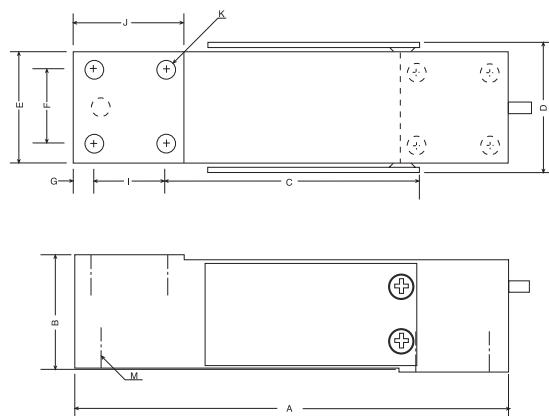

RATED CAPACITY	DIMENSIONS										
	A	B	C	D	E	F	G	I	J	K	M
kg/millimeters											
200-250	150.1	39.9	86.6	43.4	38.1	25.4	6.35	25.4	38.1	1/4-20 UNC x 13 DP	1/4-28 UNF x 10 DP
lb/inches											
441-551.3	5.91	1.57	3.41	1.71	1.50	1.00	.25	1.00	1.50	1/4-20 UNC x 0.51 DP	1/4-28 UNF x 0.39 DP

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	2000 ohms
Bridge Resistance:	350 ohms	Deflection at Capacity:	200-250 kg = .015"/.4mm
Material/Finish:	Stainless steel	Seal Type:	Environmentally sealed
Temperature:	Compensated temperature range 14°F to 104°F/-10°C to 40°C	Cable Length:	10'
Manufacturer		Cable Color Code:	Green + Excitation Black - Excitation Blue + Sense Brown - Sense Red + Signal White - Signal
Model Number:	1240-XXX101	Warranty:	1 year
Safe Overload:	150% Full scale		
Rated Excitation:	10V AC/DC (15V maximum)		
Total Error:	0.02%		

1240 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
200 kg (441 lb)	47880	\$350.00
250 kg (551.3 lb)	47881	\$350.00