
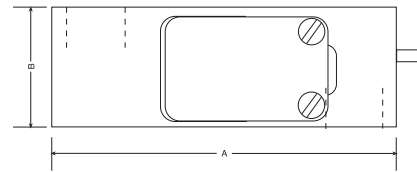


1241 Single Point, Aluminum OIML C3

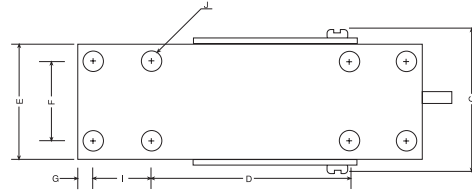

RATED CAPACITY	DIMENSIONS								
	A	B	C	D	E	F	G	I	J
kg/millimeters									
100-250	150.1	38.1	43.4	86.6	38.1	25.4	6.4	25.4	1/4-20 UNC x 13 DP
lb/inches									
220.5-551.3	5.91	1.50	1.71	3.41	1.50	1.00	.25	1.00	1/4-20 UNC x 0.51 DP

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	2000 megohms
Bridge Resistance:	350 ohms	Deflection at Capacity:	100-250 kg = .015"/.4mm
Material/Finish:	Aluminum	Seal Type:	Environmentally sealed
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Length:	1m/3.3'
Manufacturer		Cable Color Code:	Green + Excitation Black - Excitation Blue + Sense Brown - Sense Red + Signal White - Signal
Model Number:	1241-XXX101	Warranty:	1 year
Safe Overload:	150%, Full scale		
Rated Excitation:	10V AC/DC (15V maximum)		
Total Error:	0.005%		

1241 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
100 kg (220.5 lb)	47876	\$305.00
150 kg (330.7 lb)	47877	\$305.00
200 kg (441.0 lb)	47878	\$305.00
250 kg (551.3 lb)	47879	\$305.00