




1250 Potted Single Point, Aluminum

NTEP 1:5000 Class III Single Cell



Available upon request

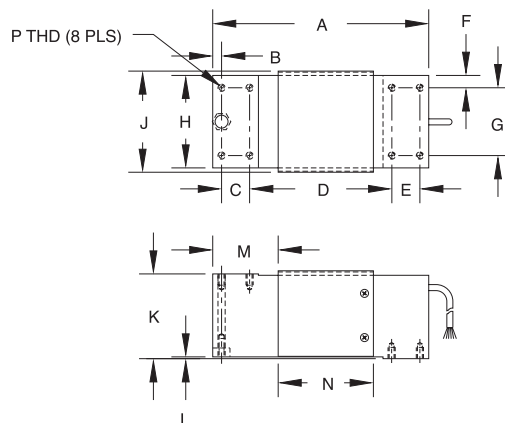

RATED CAPACITY	DIMENSIONS													
	A	B	C	D	E	F	G	H	J	K	L	M	N	P
kg/millimeters														
100-1000	191.0	11.0	25.0	125.0	25.0	7.5	60.0	75.0	82.0	75.0	1.5	57.5	85.0	5/16-18UNC X 15 DP
lb/inches														
220.5-2205	7.52	.43	.98	4.92	.98	.30	2.36	2.95	3.23	2.95	.06	2.26	3.35	5/16-18UNC X .59 DP

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	Anodized aluminum
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C
Manufacturer	
Model Number:	1250-XXXX001 (NTEP) 1250-XXXX201 (Non-NTEP)
Safe Overload:	200% of full scale at center loading point
Rated Excitation:	10V AC/DC (20V maximum)
Total Error:	0.02% Full scale

Insulation Resistance:	5000 megohms
Deflection at Capacity:	50-1000 kg ≤ .4mm/.015"
Seal Type:	Environmentally protected
Cable Length:	10'/3.1m
Cable Color Code:	Green + Excitation Black - Excitation Blue + Sense Brown ... - Sense Red + Signal White - Signal
Warranty:	2 years

1250 POTTED ORDER INFORMATION

Load Rating	Part #	Suggested List Price
Potted, NTEP 1:5000		
100 kg (220.5 lb)	33711	\$315.00
150 kg (330.7 lb)	33712	\$315.00
200 kg (440.9 lb)	33713	\$315.00
250 kg (551.2 lb)	33714	\$315.00
300 kg (661.4 lb)	33715	\$315.00
500 kg (1102.3 lb)	33716	\$315.00
635 kg (1399.9 lb)	33717	\$315.00
Non-NTEP 1:5000		
50 kg (110.3 lb)	17478	\$315.00
75 kg (165.4 lb)	17469	\$315.00
1000 kg (2205 lb)	17480	\$315.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 154) RL1250
Celtron	(see page 188) LOC
Revere Transducers	(see page 261) 652
Flintec	(see page 205) PCB