


1260 Single Point, Aluminum NTEP 1:5000 Class III Single Cell



Available upon request

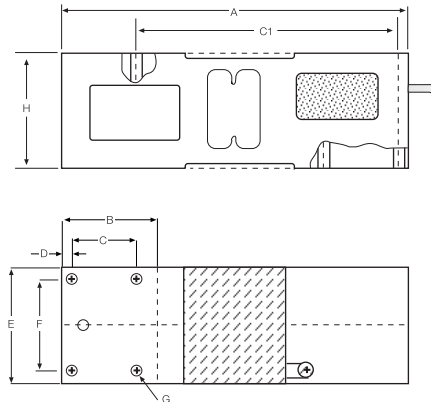

RATED CAPACITY	DIMENSIONS							
	A	B	C	C1	D	E	F	H
kg/millimeters								
50-635	188	52	35	142	5.5	62.3	50	62.3
lb/inches								
110.2-1399.9	7.40	2.05	1.38	5.59	.22	2.45	1.97	2.45

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	Anodized aluminum
Temperature:	Compensated temperature range 14°F to 110°F/-10°C to 40°C
Manufacturer	
Model Number:	1260-XXXX001
Safe Overload:	200% of full scale at center loading point
Rated Excitation:	10V DC (20V maximum)
Total Error:	0.02% Full scale

Insulation Resistance:	5000 megohms
Seal Type:	Environmentally protected
Cable Length:	10'/3m
Cable Color Code:	Green + Excitation Black - Excitation Blue + Sense Brown - Sense Red + Signal White - Signal
Warranty:	2 years

1260 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
50 kg (110.2 lb)	40769	\$310.00
75 kg (165.4 lb)	40770	\$310.00
100 kg (220.5 lb)	40771	\$310.00
200 kg (440.9 lb)	40772	\$310.00
250 kg (551.2 lb)	40773	\$310.00
300 kg (661.4 lb)	40774	\$310.00
500 kg (1102.3 lb)	40775	\$310.00
635 kg (1399.9 lb)	40776	\$310.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 153) RL1260