




1320 Single Point, Aluminum

NTEP 1:3000, Class III Single Cell



Available upon request

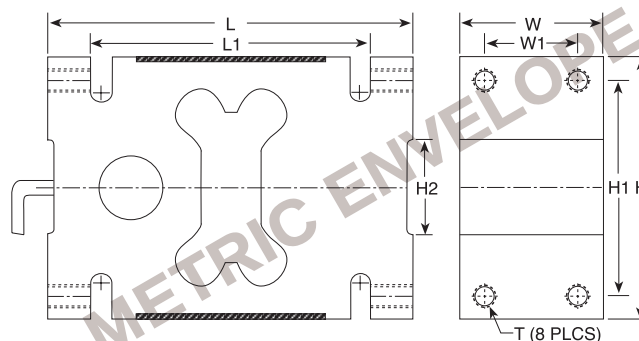

RATED CAPACITY	DIMENSIONS							
	H	H1	H2	L	L1	T	W	W1
kg/millimeters								
1000-2000	126.0	95.0	45.0	176.0	135.0	M16X2-6H	76.0	46.0
lb/inches								
2204.6-4409.2	4.96	3.74	1.77	6.93	5.31	M16X2-6H	2.99	1.81

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Deflection at Capacity:	1000-2000 kg ≤ .4mm/.015"
Bridge Resistance:	350 ohms, nominal	Max. Platform Size:	4' x 4'/1.2m x 1.2m
Material/Finish:	Aluminum alloy	Seal Type:	Environmentally protected
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Length:	6m/19.7'
Manufacturer:		Cable Color Code:	Green + Excitation Black - Excitation Blue + Sense Brown ... - Sense Red + Signal White - Signal
Model Number:	1320-XXXX101	Warranty:	2 years
Safe Overload:	150% Full scale		
Rated Excitation:	10V DC/AC (15V maximum)		
Total Error:	0.02% Full scale		
Insulation Resistance:	2000 megohms		

1320 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
1000 kg (2204.6 lb)	29908	\$450.00
1500 kg (3306.9 lb)	29909	\$450.00
2000 kg (4409.2 lb)	29910	\$450.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Celtron	(see page 188) HOC