



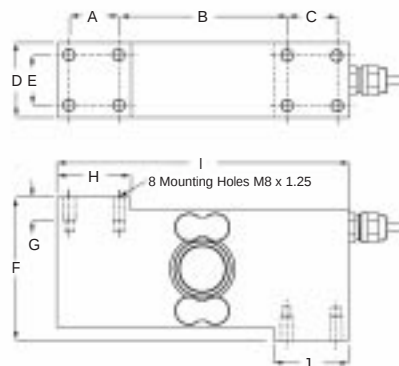

1510 Single Point Stainless Steel, IP68 Hermetically Sealed

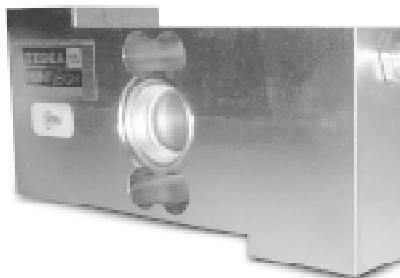

RATED CAPACITY	DIMENSIONS									
	A	B	C	D	E	F	G	H	I	J
lb/inches 100-500 lb	56.0	190.7	56.0	84.0	56.0	161.0	26.5	84	330.7	84
kg/millimeters 100-500 kg	25.4	86.5	25.4	38.1	25.4	73	12	38.1	150.00	38.1

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Cable Length:	1m
Bridge Resistance:	350 ohms, nominal	Cable Color Code:	Green + Input Black - Input Blue + Sense Brown - Sense Red + Output White - Output
Material/Finish:	Stainless steel	Warranty:	2 years
Temperature:	Compensated temperature range -14°F to 104°F/-10°C to 40°C		
Safe Overload:	150% at center loading point, full scale		
Rated Excitation:	10V DC (15V maximum)		
Total Error:	0.020% Full scale		
Insulation Resistance:	1000 megohms		
Seal Type:	Hermetically sealed, IP68		

1510 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
Stainless Steel*		
100 kg (220.5 lb)	65851	\$795.00
250 kg (551.2 lb)	65852	\$795.00
500 kg (1102.3 lb)	65853	\$795.00