




305 Single-Ended Beam, Aluminum with Stainless Steel Cover

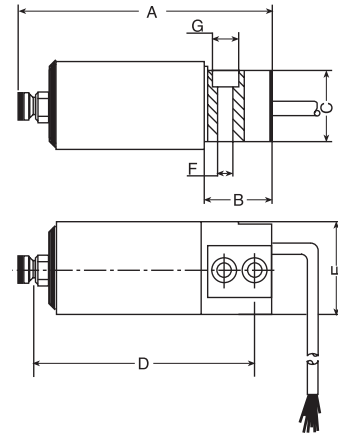

RATED CAPACITY	A	B	C	DIMENSIONS D	E	F	G
kg/millimeters							
5-30	94.5	26.0	26.0	84.5	31.0	5.2	9.0
lb/inches							
11-66.2	3.72	1.02	1.02	3.32	1.22	.20	.35

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Deflection at Capacity:	5-30 kg = .015"/.4mm
Bridge Resistance:	350 ohms, nominal	Seal Type:	Environmentally protected
Material/Finish:	Aluminum, with stainless cover	Cable Length:	1m/3.3'
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Coloring:	Green ... + Excitation Black - Excitation Blue + Sense Brown ... - Sense Red + Signal White - Signal
Manufacturer		Warranty:	2 years
Model Number:	0305-XXXX201		
Safe Overload:	150% Full scale		
Rated Excitation:	10V AC/DC (20V maximum)		
Total Error:	0.02% Full scale		
Insulation Resistance:	5000 ohms		

305 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
5 kg (11 lb)	47887	\$250.00
7 kg (15.4 lb)	47888	\$250.00
10 kg (22.1 lb)	47889	\$250.00
15 kg (33.1 lb)	47890	\$250.00
20 kg (44.1 lb)	47891	\$250.00
30 kg (66.2 lb)	47892	\$250.00