



355 Single-Ended Beam, Stainless Steel

Hermetically Sealed, IP68, NTEP 1:4000 Single Cell, 1:5000, Multiple Cell, Class III

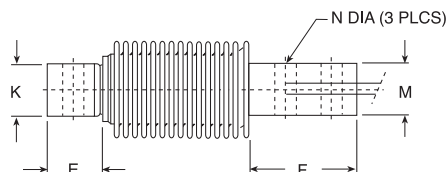

Available upon request

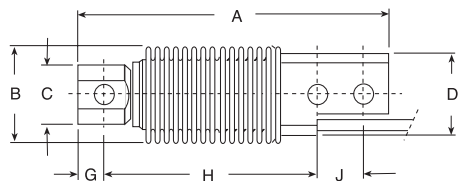

RATED CAPACITY	DIMENSIONS											
	A	B	C	D	E	F	G	H	J	K	M	N
kg/millimeters												
5-500	120.0	40.0	23.0	32.0	20.5	45.5	10.0	82.0	18.0	20.0	20.0	8.20
lb/inches												
11.0-1102.3	4.72	1.61	.91	1.26	.81	1.79	.39	3.23	.71	.79	.79	.32

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Compensated range 14°F to 104°F/-10°C to 40° C
Manufacturer	
Model Number:	0355-XXXX001
Safe Overload:	150% Full scale
Rated Excitation:	10V AC/DC (15V maximum)
Total Error:	0.02% Full scale

Insulation Resistance:	1000 megohms
Deflection at Capacity:	5-250 kg ≤ .4mm/.015"
Seal Type:	Hermetically sealed, IP68
Cable Length:	10'/3m
Cable Color Code:	Blue + Excitation Black - Excitation White + Signal Red - Signal Green + Sense Gray - Sense
Warranty:	2 years

355 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
5 kg (11.0 lb)	30165	\$525.00
10 kg (22.0 lb)	30166	\$525.00
20 kg (44.1 lb)	30167	\$525.00
50 kg (110.2 lb)	30168	\$525.00
100 kg (220.5 lb)	30169	\$525.00
200 kg (440.9 lb)	30170	\$525.00
250 kg (551.2 lb)	30171	\$525.00
500 kg (1102.3 lb)	36463	\$525.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 123) RLHBB
Revere Transducers	(see page 244) SHB

WEIGH MODULE AVAILABLE

Model	Page #
1700HE	16