


620 S-Beam, Stainless Steel

Hermetically Sealed, IP68, NTEP 1:3000 Single Cell, 1:5000 Multiple Cell, Class III



Available upon request

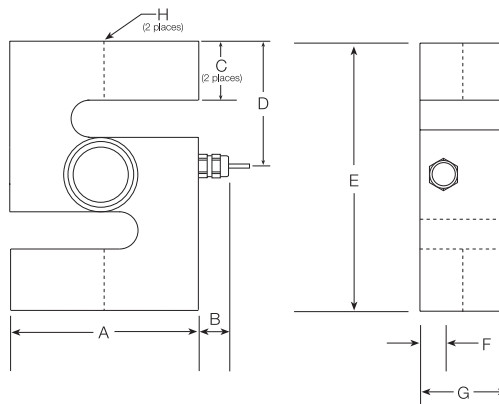

RATED CAPACITY	DIMENSIONS							
	A	B	C	D	E	F	G	H
kg/millimeters								
500-1000	73.2	18.8	19.8	47.0	94.0	10.9	33.5	1/2-20 UNF
2000	73.2	18.8	19.8	47.0	94.0	10.9	33.5	3/4-16 UNF
5000	104.6	18.8	27.2	62.7	125.5	14.5	47.2	1-12 UNF
lb/inches								
1102.3-2204.6	2.88	.74	.78	1.85	3.70	.43	1.32	1/2-20 UNF
4409.2	2.88	.74	.78	1.85	3.70	.43	1.32	3/4-16 UNF
11,023.1	4.12	.74	1.07	2.47	4.94	.57	1.86	1-12 UNF

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
 Bridge Resistance: 350 ohms, nominal
 Material/Finish: Stainless steel
 Temperature: Compensated range
 14°F to 104°F/-10°C to 40°C
 Manufacturer Model Number: 0620-XXXX001
 Safe Overload: 150% Full scale
 Rated Excitation: 10V AC/DC (15V maximum)

Total Error: 0.02% Full scale
 Insulation Resistance: 1000 megohms
 Seal Type: Hermetically sealed, IP68
 Cable Length: 5m/16.4'
 Cable Color Code:
 Blue + Excitation
 Black - Excitation
 Green ... + Sense
 Gray - Sense
 White + Signal
 Red - Signal
 Warranty: 2 years

620 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
500 kg (1102.3 lb)	36389	\$650.00
1000 kg (2204.6 lb)	36390	\$650.00
2000 kg (4409.2 lb)	36391	\$650.00
5000 kg (11,023.1 lb)	36392	\$815.00

WEIGH MODULE AVAILABLE

Model	Page #
ITCM Isolated Tension Cell Mount	335