

920i

PROGRAMMABLE INDICATOR/CONTROLLER



RICE LAKE



04/06/2002 12:31 AM

**YOUR
PROCESS
HERE**

TANK #1
806.4 lb.

Scale #

I... CAN DO ANYTHING.

Start Accelerate Slow Down Aghata STOP

1 2 3
4 5 6
7 8 9
0

The 920i is built with best-in-class core features that allow you to control your process with unprecedented efficiency. From there, it's up to you. With a unique modular design and tools that simplify custom programming, the 920i can be and do exactly what your application requires.



09/2002	02:33PM	TRUCK 1
CME152	45260 lb	03:41
FI454	32500 lb	09/01/20
FI546	32500 lb	03:28
FI546	32500 lb	09/01/20
FI546	32500 lb	03:28
FI546	32500 lb	09/01/20
FI546	32500 lb	03:41
FI546	32500 lb	09/01/20
FI546	32500 lb	03:28
FI546	32500 lb	09/01/20
FI546	32500 lb	03:28
FI546	32500 lb	09/01/20





desktop —
— panel mount
universal —
— wall mount

Whatever you imagine...

Simplicity, ultimate flexibility, infinite power.

i am different.



Yes, the revolutionary 920i
is indeed different.
Different,
yet intuitively
familiar for even the
least experienced operators.

The 920i is truly the first of its kind
to blend revolutionary user interfaces, total
flexibility and ultimate processing performance with the simplicity
of a basic weight meter. • We took several key features from weight
instruments, PLCs and computers, incorporated robust state-of-
the-art electronics and wrapped them in virtually indestructible
packaging options to deliver the most advanced programmable
instrument the industry has ever seen. • Adding an entirely
new dimension in flexibility for solution providers and users
alike, the 920i delivers simplified customization at a fraction of
the cost of traditional process instrumentation. From tailored
“basic” weighing, to complex process automation,
the 920i gives you exactly what you need,
exactly the way you want it.

i am intelligence. While most programmable indicators/controllers can run complicated programs, operating them can be equally difficult. The 920i's intelligent design has changed all that. We've combined performance-driven circuitry, simplified architecture, and intuitive features to provide an instrument that offers virtually unlimited power, yet is remarkably easy to use.

Customized soft keys put increased productivity at your fingertips. Programmable keys provide instant access to frequently used functions such as selecting a formula, starting a batch, beginning a data collection sequence, or searching or sorting a file. They can be redefined throughout a program, providing a virtually unlimited number of soft keys. When your process changes, soft key functions can easily be modified in the field.

Data acquisition and storage play a vital role in successful supply chain management. From simple transaction and inventory records to complex data manipulation, the 920i will help you manage critical information in a way that best fits your process. Battery-backed memory allows you to customize database files to store information like ID numbers, transactions, formulas, label formats, and PLUs. With up to 14MB of optional memory, the 920i can house multiple database files or allow you to download information to a standard data management software program on your PC.



i can do it easier, faster and smarter.



Your window of opportunity to a new dimension
in process efficiency.


- Real-time bar graphs show filling and batching
- Simultaneously view up to 32 sensor inputs, or up to 4 Legal-for-Trade scales
- Up to 10 different screens can be programmed to change with your process
- Graphic icons and messages show setpoint & function status



Bar graphs and visual messages inform you at a glance when a batch or fill is in process and when it's approaching target weights.



A 32 channel display capability allows viewing of weight on an individual scale and a combination of totalized scales.

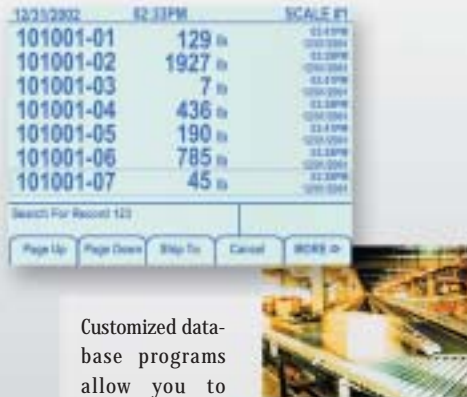

Customized database programs allow you to store, access and analyze critical production information.

i am speed. As companies are continually pressed to do more with fewer resources, they expect more from their equipment. The 920i delivers the speed you need to stay ahead of the competition. Combining the power of three advanced features, it processes data light years faster than existing programmable instrumentation.



For high-speed checkweighing, batching and filling,

the 920i has raised the industry bar in A/D speed. Running single or multiple A/Ds at selectable rates from 7.5 to 960 updates per second, the 920i is 16 times faster than the closest published competitor claim.* The industry's most effective digital filtering and a selectable display update rate ensure accurate, stable weighments.

For program controlled functions, the 920i has removed the slowest step in the internal process—language compilation. When teamed with the latest industrial chip technology, the result is extremely efficient processing.

Multi-tasking at the speed of i. Until now, performing even simple weighing operations while running a program put your operation into slow motion. We've changed all that with technology we call ESP (Event Sequential Protocol). Similar to computer processing technology, events are identified, prioritized and executed by handlers with unprecedented efficiency. In the time it takes most other programmable instruments to loop through a process cycle and address a single random resource demand, the 920i has already executed a sequence of critical tasks in order of highest priority.



i am flexibility. The rapidly changing business climate requires products that will meet today's needs and evolve to exceed tomorrow's demands. The 920i's modular design allows you to choose only the options necessary for your current application, yet leaves room for future expansion. Whether your process requires multiple scales or connection to other peripherals, the 920i offers a full range of options** to get the job done:

- Up to 28 A/Ds (scales) and 32 channels
- 100 setpoints
- Up to 340 digital I/O
- Up to 32 serial ports
- Up to 14 analog outputs
- Up to 14 pulse inputs

Easily integrated into new or existing automation systems, the 920i provides open connectivity to the most popular networking interfaces. In fact, with the ability to communicate with and control your other indicators, it performs much like a traditional PLC.



*A/D conversion rate comparison based on latest published claims of competitive programmable indicators. **Requires hardware expansion and is dependent upon combinations.

What can the 920i do for YOUR operation?
Find out at WWW.RLWS.COM



920i video



interactive front panel demonstration



application specific overviews

Rice Lake Weighing Systems manufactures and distributes a full line of process control weighing equipment.
Request literature, download data sheets, or request a quote at WWW.RLWS.COM

Standard Features

Large 4.6" W x 3.4" H, 320 x 240 pixel back-lit LCD graphical display
Selectable character sizes from .25" to 1.2"
Display up to four scale channels with required Legal-for-Trade information per screen
32 individual scale accumulators
Five displayed soft keys with 10 user-defined and 14 preset functions per screen
Front panel or serial configuration/calibration
NEMA 4X/IP66 stainless steel enclosure
Four bidirectional communication ports
Operator prompts
Four on-board digital I/O

100 configurable setpoints
Two option card slots
1000-ID truck registers for in/out weighing
Programmable ticket formats
ESP event-driven processing
User programmable 128K flash memory
Power for 16 (350 ohm) load cells per A/D option card
Multiple screens (program control)

Option Cards

Digital I/O, 24 channel
A/D dual or single channel
0-4 kHz pulse input
Analog output selectable (0-10V, 0-20 mA)
Memory, 1MB
Two channel serial (accommodates RS-232, RS-485 and 20 mA current loop)
2- and 6-card expansion boards

RS-232
RS-485

20 mA
current loop

DeviceNet™

PROFIBUS

ROCKWELL AUTOMATION
ENCOMPASS
AMERICAN PARTNER

ETHERNET
connectivity

Communication protocol cards

DeviceNet
Remote I/O
Pro bus DP
Ethernet TCP/IP 10/100 Base-T module

Approvals



CC #01-088
Pmax = 10,000
Class III/III



Desktop/Universal listed
Wall Mount listed (508A control panel)
Panel Mount recognized




Measurement
Canada
Approved



Enclosure Options

Universal Mount



A = 10.5" B = 4.5" C = 11.5"


Common Applications

General purpose indoor/outdoor
Con ned space
Data entry

Model-Specific Features

360° mounting configuration
Accommodates 2 option cards internally (up to 14 total)

Wall Mount



A = 16" B = 14" C = 6.75"


Common Applications

Control systems
Industrial indoor/outdoor
Material handling

Model-Specific Features

Space for manual overrides
Accommodates 8 option cards internally (up to 14 total)
Accommodates internal relays

Desktop



A = 10.5" B = 8.5" C = 4.5"


Common Applications

Data entry
Truck scale
Office environment

Model-Specific Features

Ergonomically efficient
Accommodates 2 option cards internally (up to 14 total)

Panel Mount



A = 9.1" B = 5" C = 11.6"

Common Applications

Process control
Retrofit existing panels
Custom consoles

Model-Specific Features

Optimizes panel space
Accommodates 4 option cards internally (up to 14 total)

Your Rice Lake Weighing Systems distributor is:

RICE LAKE WEIGHING SYSTEMS
Industrial Solutions on a Global Scale®



230 W. Coleman St. Rice Lake, WI 54868 USA
TEL: 715-234-9171 FAX: 715-234-6967 WEB SITE: www.rlws.com

© Rice Lake Weighing Systems 2002 PN 69119 5/02
Specifications subject to change without notice