

Applications

- Desktop scales
- Industrial work stations
- Truck scales
- System interface with PK280 and PK280SS, most personal computers and a variety of scale peripherals

Standard Features


- Vertical tabs
- Long lasting, self-inking ribbon cartridge
- Bit image graphics for plotting charts, graphs and drawings
- Full ASCII character set
- 9-pin, long-life printhead
- Friction and adjustable pin feed paper handling

Okidata 184 Turbo:

- RS-232 interface or parallel input
- Near letter-quality printing at 50 characters per second
- Superscripts, subscripts and underlining
- Bottom, rear or top feed

Okidata 320 Turbo:

- Centronics®-compatible parallel interface
- Near letter-quality printing at 63 characters per second
- 80 column with standard character, 160 columns with condensed characters
- Front access panel for quick and easy control of type size, print quality and other frequently used printer functions

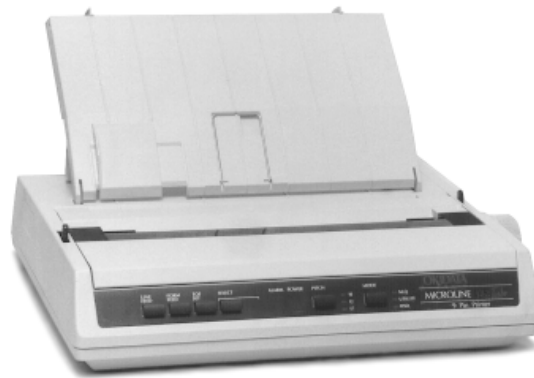

Okidata 184 Turbo Microline



Okidata 320 Turbo Microline

PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
20188	Okidata 184 Turbo Printer w/RS-232 input, 115 VAC	10 lb	\$595.00
40515	Okidata 184 Turbo Printer w/RS-232 input, 230 VAC	10 lb	650.00
41222	Okidata 320 Turbo Microline Printer w/parallel interface, 115 VAC	16 lb	720.00
41223	Okidata 320 Turbo Microline Printer w/parallel interface, 230 VAC	16 lb	720.00
OPTIONS/ACCESSORIES			
OKIDATA 184 TURBO			
20236	Tractor feed kit		85.00
20664	Ribbon cartridge		7.00
21208	Protective dust cover		55.00
OKIDATA 320			
41224	Pull tractor kit—for bottom-fed continuous forms and push/pull operation		95.00
20239	RS-232 input board		165.00
20664	Ribbon cartridge		7.00
21226	Protective dust cover		55.00

OKIDATA 184 TURBO & 320 TURBO SPECIFICATIONS

PRINT CHARACTERISTICS

Print Speed: 62.5 cps Near Letter-quality, 250 cps Utility, 300 cps high speed draft

Print Head Life: 200 million characters

Graphics Resolution:

Okidata 184: 60 x 72 dpi minimum

240 x 216 dpi maximum

MICROLINE Standard: Epson/IBM®

288 x 144 dpi maximum

Characters Per Line:

Okidata 184: 40 characters at 5 cpi

Okidata 320: Software selectable

Print Line:

Okidata 184: 8" (203.2mm) wide

Okidata 320: 8.5" (215.9mm) wide

Character Formation:

Impact

Character Set:

Okidata 184: IBM® set I and II, Spanish, French, Canadian, Zero/Slashed Zero
Okidata 320: Standard ASCII, block and line graphics (IBM®—Set I, II & III) (Epson - Set I and II) Epson IBM®—14 foreign character sets; Standard ML—12 foreign character sets

Line Spacing:

Okidata 184: 6 lines per inch (25.4mm)

RIBBON

Cartridge: Self-inking ribbon

Ribbon Life: 3 million characters

INTERFACING

Serial Interfaces: RS-232 or parallel Centronics®

Baud Rates: 110 to 19.2K maximum

(XON/XOFF, Ready/Busy)

Parity: Even or odd

Parallel Logic Level: TTL

Optional: RS-232 serial, 300 to 19.2 Kbaud (ready/busy or XON/XOFF protocol)

WARRANTY

One year limited warranty (includes printhead)