


Graphic-Engine™ (GE)

Low Cost User Interface Controller
Graphical Color Images on QVGA LCD/TFT,
Touch Screen, Ethernet & CompactFlash

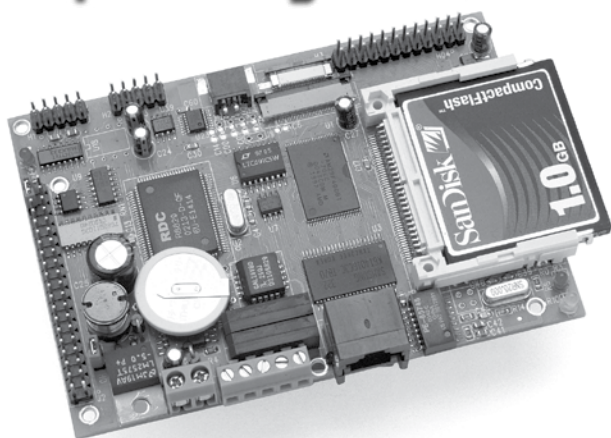

Features

- 3.15 x 4.35 inches, 40 MHz 186 CPU, program in C/C++
- Switching regulator, 50 mA standby, 160 mA at 12V
- 256 KW SRAM, 256 KW Flash, 512 bytes EEPROM
- 20+ TTL I/O, timer/counters, RTC, Battery
- 2 Mechanical Relays. 2 DAC outputs
- Supports multiple QVGA panels such as:
Kyocera (TCG057QV1AA-G00)
Kyocera (KCG057QV1DC-G50)
Kyocera (KG057QV1CB-G00)
Sharp(LM057QC1T01)
Optrex(F51167NCU)
NanYa(LCBFA639NT)
ARIMA(MC57T01G)
OKAYA(UMS-7360MC-1CS)
- 4-wire analog touch screen controller
- 2 RS232/RS485 serial ports, 10 BaseT Ethernet with TCP/IP
- CompactFlash with Windows compatible file system support


The **Graphic-Engine(GE)™** is a low cost industrial controller ideal for User Interface Applications. Those with premium graphic requirements will benefit from an ultra-bright, wide viewing angle active TFT color display. A LCD controller (S1D13705, EPSON) is on-board with internal 80KB image buffer, supporting QVGA color graphic TFT/LCD of 320x240 pixels. A touch screen controller (ADS7846) supports 4-wire resistive touch screen. All components are installed on single PCB, which can be mounted on the backside of a QVGA LCD for easy integration into user applications. Comprehensive, user-friendly software libraries and samples are provided. User can easily design their custom functions keys, text, logo, and graphics. Supported by the CompactFlash file system, 20 impressive color images can be displayed per second via DMA transfer.

The 40 MHz 16-bit 186 CPU with 256KW flash, 256 KW battery-backed SRAM is C/C++ programmable. The **GE** supports two RS232 ports, timer/counters, RTC, relays, Ethernet, and CompactFlash. One serial port can be configured to RS485. There are 20+ TTL I/Os, 2 mechanical relays with contact rating of 200V, 0.5 Amp., Three 16-bit CPU internal timer/counters supports PWM, or pulse-width demodulation.

Two channels of 12-bit DAC(DAC7612) can output 0-4.095V analog voltage. An optional 10-baseT Ethernet LAN controller (CS8900) can be installed. Software stack library is available, supporting network protocols such as ARP, DHCP, UDP, ICMP, and of course TCP over the Ethernet network.

The **GE** supports 50-pin CompactFlash cards for removable mass data/image storage. TERN software supports Linear Block Address mode, and Windows compatible FAT16 flash file system. On-board switching regulator (LM2575) allows 8-30V unregulated DC power input without over heating.

The on-board LCD controller(S1D13705) provides frame data and control signals for most QVGA color LCD/TFT. The image data and control signals are available on a 24-pin, 0.1" spacing header. These signals includes: frame data D0-11, Vertical Start(YD), Pixel clock (XCK), Line Start(LP), contrast adjust voltage(0-4V) and a DRDY for the TFT. A custom cable may be required to match the color LCD pin interface. Some QVGA LCD also requires adding an external +27V contrast control voltage. See the special cable in the photo connecting the **GE** header(H4) and the Sharp LCD. The single loose wire needs external +25V. Also an external CCFL backlighting power may be needed.

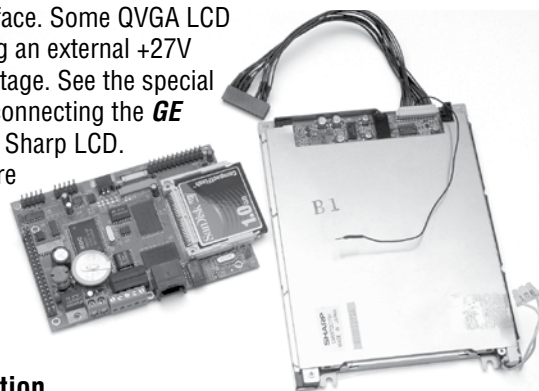

Ordering Information

GE **\$149/\$119/\$79** **Qty 1/100/1K+**

Includes: 186 CPU 40MHz, 256 KW Flash, 256KW SRAM, EE, 2 RS232, 2 Relays, 5V linear regulator.

NOT including options. OEM option discounts available.

Add-on Options:

1) RTC and battery	\$20
2) 2 ch. 12-bit DAC (DAC7612).....	\$20
3) LCD controller (S1D13075)	\$40
4) Touch screen controller (ADS7846).....	\$20
5) CompactFlash interface	\$20
6) RS485 for the SER1.....	\$10
7) Ethernet Interface(ET).....	\$30
8) Switching Regulator	\$20
9) TFT/STN, TouchScreen, CCFL, Bezel	Call

Typical Order Example:

GE + RTC+ battery

GE + 1 = \$149 + \$20 = \$169



CE FC

1724 Picasso Avenue, Davis, CA 95618 USA
Tel: 530-758-0180 • Fax: 530-758-0181

sales@tern.com

http://www.tern.com