

2.54mm (0.1") Female Header

(Dual Row, Straight & Right angle)

2221 Series






APPLICATION AND FEATURES

1. For standard profile application 8.5mm high.
2. Accept 0.64mm square pin with closed entry.
3. Tuning-fork type contacts designed for low cost.
4. Different foot length for customer design choice.
5. Mate with pin header such as 2202,2205,2100 & 2204D series.

SPECIFICATIONS

Current Rating:	3 Amps
Insulator resistance:	5000 Megohms min.
Contact resistance:	20 m ohm Max.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-40° to +105°C
Contact Material:	Phosphor bronze
Insulator Material:	Polyester, UL 94V-0
	© Standard: Nylon-6T

Recommended P.C.Board
Hole Layout

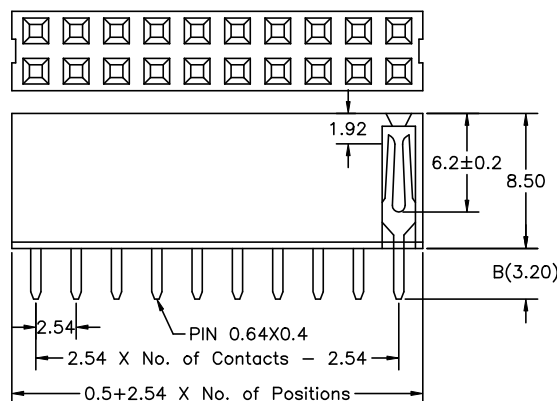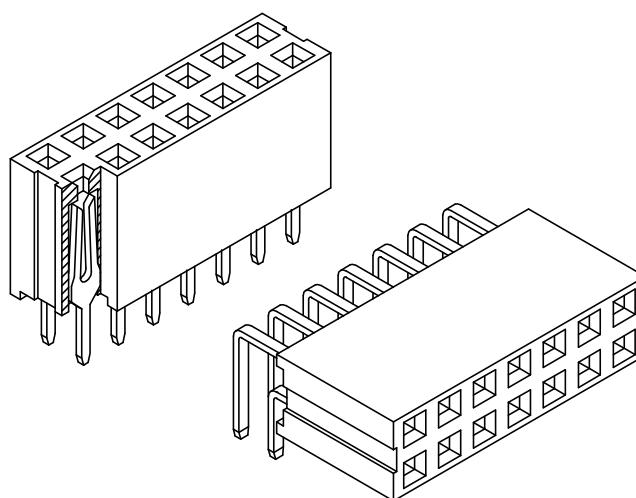

Order Information 2221 Series

Example: 2221-34-S-02-3.2

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2221	06 to 80 Contacts	Straight S	Tin Plated 01	S-B R-B
		Right Angle R	Gold Plated	3.2 3.2
			Flash 02	6.0 8.0
			10 μ" 10	11.0
			30 μ" 30	