



ULTRX Panel Bracket Kit




Panel Bracket Kit is used with steel panels and permits panel adjustment from front to rear. Fits all ULTRX sizes. Mounts on integrally molded body rail. Brackets are plated steel. All mounting hardware is included.

Catalog Number	Description	Pkg. Qty.
UUPB	ULTRX Panel Bracket Kit	4

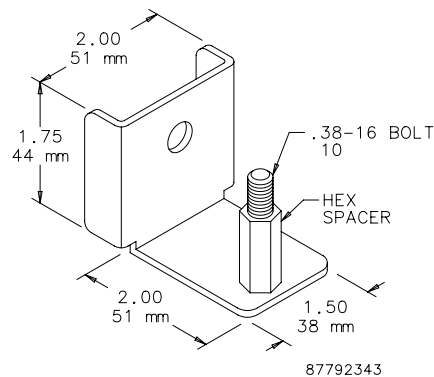


ULTRX Swing-Out Panel




Swing-Out Panel (14 or 16 gauge) installs front-mounted panels in ULTRX fiberglass enclosures. Developed primarily to complement window door units, the front-mounted swing panel is suited for any application that requires a display of gauges, dials, or any type of control equipment monitor. Easy installation; no drilling required. Fully adjustable front to rear. Panel and mounting hardware included.

NOTE: Swing-out panel will not slide all the way forward in 400mm deep enclosures. Consult factory for more information.

Catalog Number	Fits Enclosure A x B (mm)	L (mm)	L (in.)	W (mm)	W (in.)
UU5040SP	496 x 395	432	17.01	330	12.99
UU6050SP	608 x 496	536	21.10	432	17.00
UU6060SP	608 x 595	533	20.98	533	20.98
UU7560SP	758 x 595	686	27.01	533	20.98
UU10080SP	1008 x 808	935	36.80	737	29.00

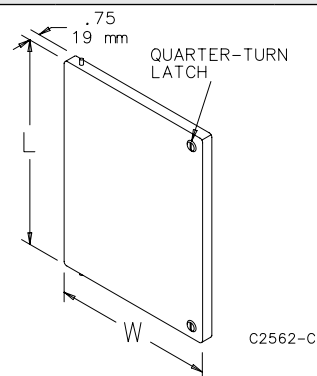

ULTRX Grounding Device



Grounding Device provides a means of attaching a grounding conductor to an ULTRX swing-out panel or swing-out frame. All installation hardware and instructions are included.


Catalog Number	Description
UUGK	Grounding Device

Panels for Type 3R, 4, 4X, 12, and 13 Enclosures

Steel panels are 12 gauge and have a white finish. Panel mounting hardware is furnished with all enclosures which accept these panels.


Catalog Number	Panel Thickness (ga.) or Flange Thickness (T)	Panel Size D x E (in.)	Panel Size D x E (mm)	Number of Holes	Edge Flanges
A20P16	12 ga.	17.00 x 13.00	432 x 330	4	None
A24P20	0.75 (19)	21.00 x 17.00	533 x 432	4	2
A24P24	0.75 (19)	21.00 x 21.00	533 x 533	4	2
A24P24WD ^a	0.75 (19)	21.00 x 21.00	533 x 533	4	—
A30P24	0.75 (19)	27.00 x 21.00	686 x 533	4	2
A40P30	0.75 (19)	37.00 x 29.00	940 x 737	4	4

^a Panel catalog number with "WD" is wood.

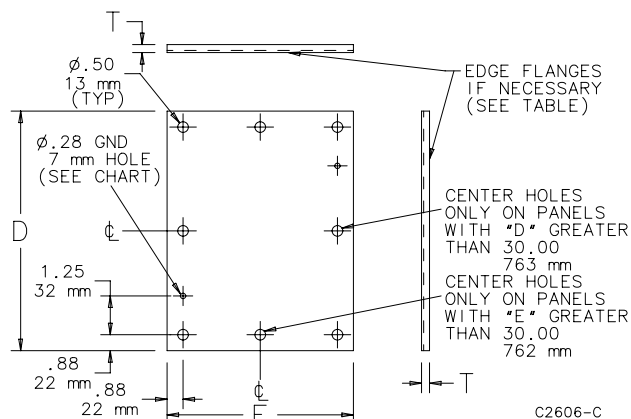


C2606-C

ULTRX Rack Angles (Type RA)




Pairs of full-length rack mounting angles are available for mounting 19-inch (483mm) rack-mounted equipment. Type RA angles are 14 gauge steel with mounting holes .281-inch (7mm) in diameter and spaced per EIA standard RS-310-D (universal spacing). Use clip nut package (ANI032) to provide tapped holes at desired locations. Angles and mounting hardware are plated steel. Mounting hardware is furnished.

Catalog Number	Fits A x B (mm)	Fits A x B (in.)	L (mm)	L (in.)	N (mm)	N (in.)	Units	Pkg. Qty.
UURA6060	610 x 610	24.00 x 24.00	552	21.75	10	.38	12	2
UURA7560	762 x 610	30.00 x 24.00	705	27.75	19	.75	15	2

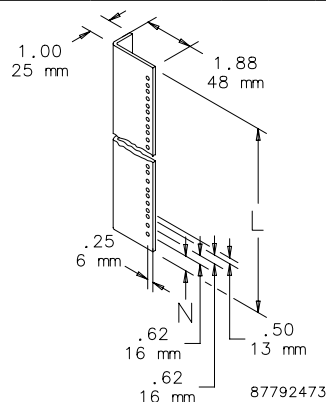

ULTRX Keylock Kit and Padlock Kit




Keylock Kit or pushbutton style Padlock Kit is easily inserted in latch hole to prevent unauthorized personnel from gaining access to enclosure contents. Each kit is fully assembled for easy installation in the field. Type 316 stainless steel construction.

Catalog Number	Description
UUHKL	Keylock Kit
UUHPL	Padlock Kit

UUHKL: Internal key components are not stainless steel.

UUHPL: Handles maintain UL 508A, 508 Type 3, 4, 4X, and 12 when properly installed on a Hoffman enclosure. Set up for 1/4-inch or 3/8-inch padlock.

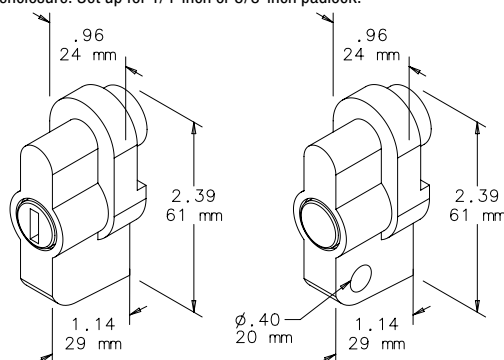


Keylock Kit

Padlock Kit

87792346


ULTRX Swing Frame



Swing Frame provides 19-inch rack-mounting capabilities with U-Style (Type RA) mounting hole pattern. Quarter-turn latch has 100° swing. Adjustable mounting provision. 14 gauge plated steel. Mounting hardware included. Swing frame maintains enclosure rating if properly installed in a Hoffman enclosure.


NOTE: Swing Frame will not slide all the way forward in 400mm-deep enclosures. Consult factory for more information.

Catalog Number	Fits A x B (mm)	Fits A x B (in.)	L (mm)	L (in.)	W (mm)	W (in.)	Units
UU6060SF	610 x 610	24.00 x 24.00	540	21.25	535	21.08	11
UU7560SF	762 x 610	30.00 x 24.00	687	27.05	535	21.08	14

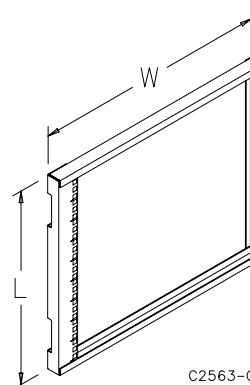

C2563-C


ULTRX Door Stop Kit



Door Stop Kit limits door to 120-degree opening. Field installable on all sizes of ULTRX enclosures. Type 304 stainless steel construction.

Catalog Number
UUDS


ULTRX Key Insert



Inserts can be substituted for the standard quarter-turn latch. Inserts are Type 316 stainless steel.


Catalog Number	Insert Type
UUL3DB	Double-bit 3mm
UULSC	Screw driver slot

ULTRX Mounting Bracket Kit



Kit is field installable. Corrosion-resistant fiberglass material is rated Type 4X. Type 316 stainless steel mounting hardware is included. Four mounting brackets per kit. Maintains UL 508A, 508 Type 3, 3R, 4, 4X, and I3 ratings.

Catalog Number
UUMF

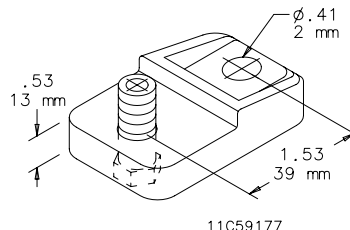


ULTRX Screw Insert Kit



Brass threaded inserts (10-32) with plated screws. Used on door bosses and DIN bosses. Four inserts and four screws per kit.

Catalog Number	Description	Kit Qty.
UUMH2	Screw Insert Kit	4 inserts and 4 screws

ULTRX Self-Tapping Screws



Plated screws (1/4-15x.88) are designed to mount panels and accessories to DIN bosses on back of enclosure. Ten screws per package.

Catalog Number	Description	Package Qty.
UUMH1	Self-Tapping Screws	10