

Remote Readout & Accessories			
	Description	Price in Us Dollars	Click to add
	Hand held remote display for LLX and MWX.	\$595.30	Add to Cart

32ft. cable with connectors for remote readouts.	\$49.00	Add to Cart
49ft. cable with connectors for remote readouts.	\$61.05	Add to Cart
98ft. cable with connectors for remote readouts.	97.25	Add to Cart
Price per meter for extra cable (max 50 m)	\$2.39	



Model LLX	Capacity t/tons	Accuracy +/- lbs.	Weight lbs.	Price in US Dollars	Click to add
0.25	500	1	2.4	\$1,885.00	Add to Cart
0.5	1,000	2	2.4	\$1,885.00	Add to Cart
1.25	2,500	5	2.4	\$1,885.00	Add to Cart
2.5	5,000	10	3.1	\$2,045.00	Add to Cart
5	10,000	20	4.2	\$2,210.00	Add to Cart
12.5	25,000	50	8.4	\$2,745.00	Add to Cart
25	50,000	100	15	\$3,055.00	Add to Cart
50	100,000	200	33	\$4,845.00	

General specification

- Liquid cristal display (LCD): 5 digits
models LLX-0.25 to LLX-5: 0.75 in. (19 mm) digits
models LLX-12.5 to LLX- 100: 1 in. (25 mm) digits
models LLX-250: 1.75 in. (44 mm) digits

Ambiant temperature range: 14° F to 120° F (-10° C to 50° C)

Weatherproof and dustproof: IP65

Material: body in aluminium alloy

Finish: adonized black

Power supply: 3 X 1.5 V, AA (standard or rechargeable batteries)

Power consumption: variable, depending on the setting of the functions

Battery life: 250 hours, with fully charged batteries (alkaline)

Accuracy: $\pm 0.2\%$ of capacity, not for commercial use

Operating coefficient: 4

Push button controls

- ON/OFF (T1)
- Tare (up to 100% of capacity) (T2)
- Peak hold (T3)



T1



T2



T3

Automatic func-

tions

- Automatic zero when switched on
- Low battery signal on display
- Overload indication on display

Adjustable functions (using a sequence of operations of the push-buttons)

Choice of unit measurement: unit display (kg, t, short ton, lbs., daN, kN)

- Automatic shutdown after 20 minutes with no addition/reduction of load
- Response rate of the display


Output (BNC socket)

- To connect to remote readout
- To connect to PC, for date processing and printing
- To connect do Dynafor® printer

Option

- Remote hand held display suitable for use with all models (ON/OFF; tare, peak hold).
- RS232 for connection to PC, printer, etc.
- Portable Dynafor® printer: customised print-out with date and time.
- Supply network
- Wireless remote, see model LLX-TR FCC approved.



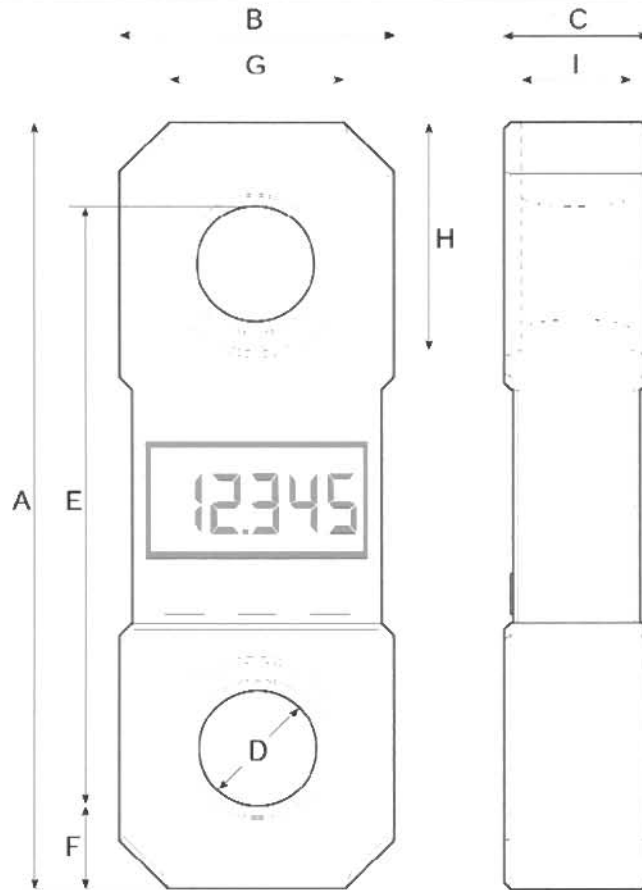

Model		LLX-0.25	LLX-0.5	LLX-1.25	LLX-2.5	LLX-5	LLX-12.5	LLX-25	LLX-50	LLX-100	LLX-250
Capacity	lbs. (t)	500 (0.25)	1,000 (0.5)	2,500 (1.25)	5,000 (2.5)	10,000 (5)	25,000 (12.5)	50,000 (25)	(50)	(100)	(250)
Accuracy	±lbs. (kg)	1 (0.5)	2 (1)	5 (2.5)	10 (5)	20 (10)	50 (25)	100 (50)	200 (100)	0.2 t	0.5 t
Smallest load increm.	lbs. (kg)	0.2 (0.1)	0.4 (0.2)	1 (0.5)	2 (1)	4 (2)	8.4 (4.2)	14.5 (7.25)	33 (16.5)	0.1 t	0.2 t
Test load	t	0.5	1	2.5	5	10	25	50	85	145	333
Max. display	t	0.25	0.50	1.25	2.5	5	12.5	25	50	100	250
Height of digits	in. (mm)	.075 (18)	.075 (18)	.075 (18)	.075 (18)	.075 (18)	1 (25)	1 (25)	1 (25)	1 (25)	1.75 (44)
Weight	lbs. (kg)	2.5 (1.1)	2.5 (1.1)	2.5 (1.1)	3 (1.4)	4 (1.9)	8.4 (3.8)	14.5 (6.6)	33 (15.1)	101 (46)	474 (215)
Material Aluminium alloy											
Dimensions in. (mm)	A	7.5 (190)	7.5 (190)	7.5 (190)	8.4 (214)	9.2 (226)	12.2 (310)	14.1 (360)	17.3 (440)	26 (660)	35.6 (905)
	B	3.2 (83)	3.2 (83)	3.2 (83)	3.2 (83)	3.5 (90)	4.3 (110)	5.3 (134)	6.5 (164)	10.2 (260)	16.7 (424)
	C	2.2 (56)	2.2 (56)	2.2 (56)	2.2 (56)	2.2 (56)	2.3 (58)	2.7 (68)	3.9 (98)	4.7 (118)	9.8 (248)
	D	0.63 (16)	0.63 (16)	0.63 (16)	0.95 (24)	1.3 (32)	1.9 (47)	2.2 (56)	2.8 (72)	4.25 (108)	5.9 (150)
	E	6.5 (166)	6.5 (166)	6.5 (166)	7.2 (184)	7.75 (197)	9.5 (243)	10.7 (272)	13 (332)	19.2 (488)	27 (685)
	F	0.5 (12)	0.5 (12)	0.5 (12)	0.6 (15)	0.6 (14.5)	1.3 (33.5)	1.7 (44)	2.1 (54)	3.4 (86)	4.3 (110)
	G	1.9 (47)	1.9 (47)	1.9 (47)	1.9 (47)	2.1 (54)	2.75 (70)	3.3 (84)	4 (104)	6.9 (174)	9.8 (250)
	H	1.7 (43)	1.7 (43)	1.7 (43)	2 (50)	2.3 (58)	3.6 (92)	4.5 (114)	5.6 (142)	8.9 (227)	12.2 (310)
	I	0.63 (16)	0.63 (16)	0.63 (16)	1 (25)	1.3 (32)	1.9 (48)	2.3 (58)	3.4 (86)	4 (104)	7.5 (190)