



10/100Mbps USB 2.0 Print Server

TE100-P1U (V2.1R & V2.2R)

TRENDnet's TE100-P1U is a print server that transforms virtually a stand-alone networkable USB printer into a shared network printer. The TE100-P1U provides Fast Ethernet interface for integrating into existing network. The TE100-P1U is designed for virtually all printers equipped with USB 2.0 compliant printer port and it is an ideal network solution to convert conventional USB printer into a shared resource on the network.

FEATURES

- Compliant with USB 2.0 High-Speed Printing
 - One RJ-45 10/100Mbps Auto-MDIX Fast Ethernet Port
 - Includes LPR Program for Windows 95/98/ME TCP/IP Printing
 - Supports IPP Printing for Windows 2000/XP
 - Supports second HTTP port for Remote Web Configuration and IPP Printing
 - Supports Mac 10.2 "Rendezvous" Zero-Configuration Function
 - TCP/IP protocol supports DHCP, IPP, LPR, HTTP
 - Includes Windows-Based Administrative Program and Web-Based Configuration
 - Built-in Flash Memory for Easy Firmware Upgrade
 - 5-Years Warranty
- *Mac Systems are only compatible with Post-Script printers


10/100Mbps USB 2.0 Print Server

TE100-P1U (V2.1R & V2.2R)

SPECIFICATIONS

Hardware	
Standards	• IEEE 802.3 10Base-T • IEEE 802.3u 100Base-TX
Printer Interface	• USB 2.0, 1.1 Compliant USB Type A Port
LAN Port	• 10/100Mbps Auto-Negotiation UTP/STP RJ-45 Port
CPU/SDRAM/Flash ROM	• RDC R2886 150MHz / 2MByte / 512KByte
LED	• Power, USB, LAN
Transport Protocol	• TCP/IP
TCP/IP Protocol Supported	• DHCP, IPP, LPR, HTTP
OS Support	• Windows 95/98(SE)/ME/NT/2000/XP/2003 • Netware 5.x NDPS LPR Remote Printing (TCP/IP) • Unixware • Linux • Mac OS X (IP Printing)
Management	• PS Utility or Web-Browser Configuration
Power	• 5V DC 2.5A External Power Adapter
Dimensions (LxWxH)	• 115 x 85 x 30mm (4.5 x 3.4 x 1.2 inches)
Weight	• 128g (4.5oz.)
Temperature	• Operating : 0 ° ~50 ° C (32 ° ~122 ° F) • Storage: -25 ° ~55 ° C (-13 ° ~131 ° F)
Humidity	• 10%~90% (non-condensing)
Certifications	• CE, FCC

NETWORKING SOLUTIONS

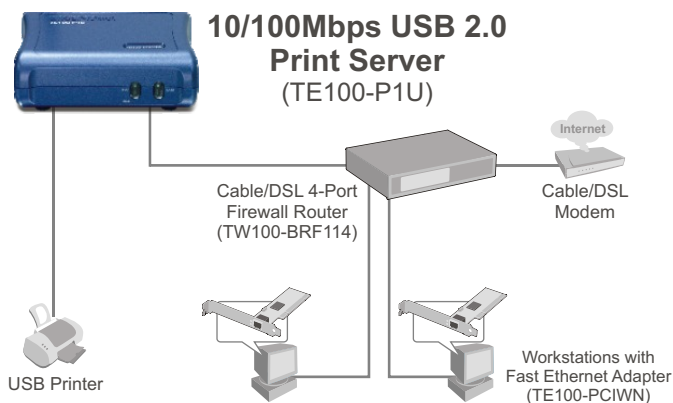

PACKAGE CONTENTS

- TE100-P1U
- Quick Installation Guide
- Utility & User's Guide CD-ROM
- Power Adapter (5V DC, 2.5A)

RELATED PRODUCTS

TE100-P1P	10/100Mbps Parallel Print Server
TE100-P21	10/100Mbps Multi-Port Print Server 2 USB 2.0 & 1 Parallel Printer Port
TEW-P1UG	54Mbps 802.11g Wireless USB 2.0 Print Server

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

