


RICE LAKE WEIGHING SYSTEMS

Industrial Solutions on a Global Scale®

RLMK15 Single-Ended Beam, Alloy Steel, IP67

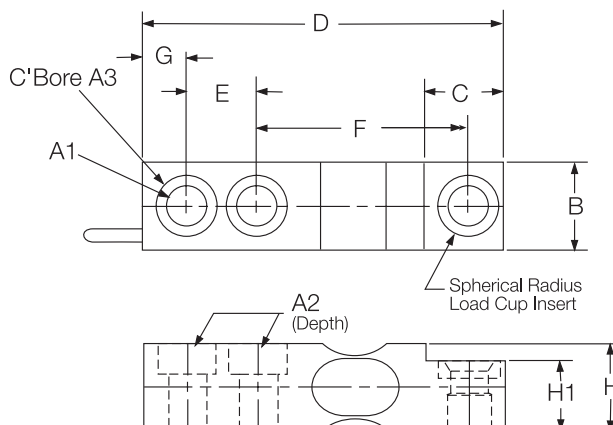

RATED CAPACITY	DIMENSIONS										
	A1	A2	A3	B	C	D	E	F	G	H	H1
lb/inches											
500-4000	.53 DIA.	.44	.84	1.25	1.12	5.13	1.00	3.00	.63	1.25	1.00
kg/millimeters											
226.8-1814.4	13.4 DIA.	11.2	21.3	31.8	28.4	130.3	25.4	76.2	16.0	31.8	25.4

SPECIFICATIONS:

Full Scale Output:	3.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	Alloy steel
Temperature:	Compensated range 0°F to 150°F/-18°C to 65°C
Safe Overload:	150% Full scale
Rated Excitation:	15V AC/DC
Nonlinearity:	0.02% Full scale
Hysteresis:	0.03% Full scale

Insulation Resistance:	>2000 megohms
Seal Type:	Environmentally protected, IP67
Cable Length:	20'/6.1m
Cable Color Code:	Red + Excitation Black - Excitation Green ... + Signal White - Signal Orange ... Shield
Warranty:	2 years

RLMK15 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
500 lb (226.8 kg)	47945	\$665.00
1000 lb (453.6 kg)	33295	\$665.00
2500 lb (1134.0 kg)	33294	\$665.00
4000 lb (1814.4 kg)	47949	\$665.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
NCI®	Mark15

NCI is a registered trademark of Weigh-Tronix, Inc.

USA: 800-472-6703 • Canada/Mexico: 800-321-6703 • International: 715-234-9171

Prices & Specifications subject to change without notice