


**Revere
Transducers**


9363 S-Beam, Stainless Steel

NTEP 1:10,000 Class IIIL Single Cell, IP67

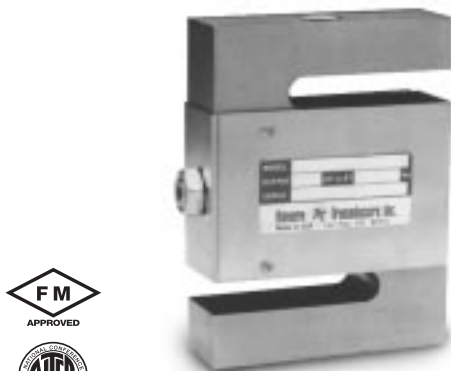

SPECIFICATIONS:

Full Scale Output:	3.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C
Manufacturer Model Number:	9363-B10-XX-20P1 (NTEP) 9363-D3-XX-20P1 (Non-NTEP)
Safe Overload:	150% Full Scale
Rated Excitation:	10V DC (15V maximum)
Combined Error:	0.025% Full Scale
Non-repeatability:	0.01% Full Scale
Insulation Resistance:	5000 megohms
Seal Type:	Environmentally protected, IP67
Cable Length:	20'/6.1m
Cable Color Code:	Red + Excitation Black - Excitation Green ... + Signal White - Signal Orange ... Shield
Warranty:	3 years

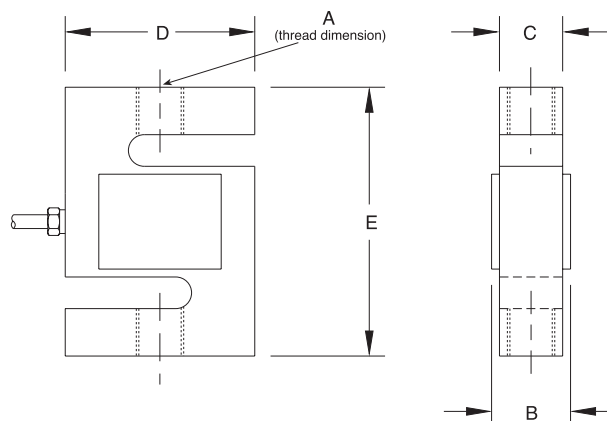

RATED CAPACITY	DIMENSIONS				
	A	B	C	D	E
lb/inches					
50-300	1/4-28 UNF-2B	.65	.46	2.00	2.40
500-1500	1/2-20 UNF-2B	.90	.71	2.00	2.40
2000	1/2-20 UNF-2B	1.15	.96	2.00	2.40
3000	1/2-20 UNF-2B	1.15	.96	3.00	3.90
5000-10,000	3/4-16 UNF-2B	1.15	.96	3.00	3.90
kg/millimeters					
22.7-136.1	1/4-28 UNF-2B	16.5	11.7	50.8	61.0
226.8-680.4	1/2-20 UNF-2B	22.9	18.0	50.8	61.0
907.2	1/2-20 UNF-2B	29.2	24.4	50.8	61.0
1360.8	1/2-20 UNF-2B	29.2	24.4	76.2	99.1
2268.0-4535.9	3/4-16 UNF-2B	29.2	24.4	76.2	99.1

9363 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
NTEP 1:10,000 cells:		
100 lb (45.4 kg)	31317	\$275.00
200 lb (90.7 kg)	31316	\$275.00
300 lb (136.1 kg)	31315	\$275.00
500 lb (226.8 kg)	31314	\$275.00
750 lb (340.2 kg)	31313	\$275.00
1000 lb (453.6 kg)	31312	\$275.00
1500 lb (680.4 kg)	31311	\$275.00
2000 lb (907.2 kg)	31310	\$275.00
3000 lb (1360.8 kg)	31309	\$315.00
5000 lb (2268.0 kg)	31318	\$440.00
10,000 lb (4535.9 kg)	31308	\$40.00
Non-NTEP cells:		
50 lb (22.7 kg)	17076	\$225.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 98) RL20000 SS

WEIGH MODULE AVAILABLE

Model	Page #
ITCM Isolated Tension Cell Mount	24-29, or 335

**Dramatically
Reduced
Prices!**

USA: 800-472-6703 • Canada/Mexico: 800-321-6703 • International: 715-234-9171