




65058 Double-Ended Beam, Alloy Steel NTEP 1:6000/1:10,000 Class IIIL Multiple Cell, IP67

**NEW
PRODUCT**

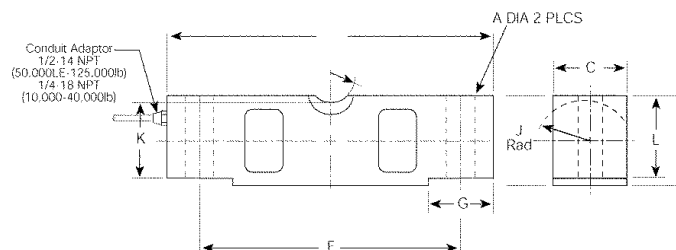

RATED CAPACITY	A	C	D	E	F	G	H	J	K	L
lb/inches										
10,000-25,000	.68	1.69	1.94	7.75	6.50	1.38	.75	.90	1.63	1.70
40,000-50,000SE*	.81	1.94	2.44	10.25	8.50	1.93	1.00	1.12	2.00	2.10
50,000LE-75,000	1.06	2.44	2.94	10.25	8.50	1.93	1.00	1.37	2.54	2.65
100,000-125,000	1.62	2.90	3.86	15.25	12.75	3.13	1.50	1.80	3.30	3.43
kg/millimeters										
4535.9-11,339.8	17.3	42.9	49.3	196.9	165.1	35.1	19.1	22.9	41.4	43.2
18,143.7-22,679.6SE	20.6	49.3	62.0	260.4	215.9	49.0	25.4	28.5	50.8	53.3
22,679.6LE-34,019.4	26.9	62.0	74.7	260.4	215.9	49.0	25.4	34.8	64.5	67.3
45,359.4-56,699.1	41.2	73.7	98.0	387.4	323.9	79.5	38.1	45.7	83.8	87.1

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V
Bridge Resistance: 700 ohms, nominal
Material/Finish: High-alloy steel, nickel plated
Temperature: Compensated range
14°F to 104°F/-10°C to 40°C
Mfr. Model Number: 65058A-XX-6000 (1:6000)
65058A-XX-1000 (1:10,000)
Safe Overload: 150% Full scale
Rated Excitation: 10V DC (25V maximum)
Nonlinearity: 0.03% Full scale

Hysteresis: 0.02% Full scale
Insulation Resistance: 5000 megohms
Seal Type: Environmentally protected, IP67
Cable Length: 35'/10.6m
Cable Coloring: Red + Excitation
Black - Excitation
Green ... + Signal
White - Signal
Warranty: 2 years

65058 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
NTEP 1:6000		
20,000 lb (9071.9 kg)	21560	\$615.00
25,000 lb (11,339.8 kg)	21561	\$615.00
40,000 lb (18,143.7 kg)	21586	\$740.00
50,000 lbLE (22,679.6 kg)	21562	\$815.00
60,000 lb (27,215.5 kg)	21563	\$815.00
75,000 lb (34,019.4 kg)	21564	\$815.00
100,000 lb (45,359.4 kg)	21587	\$1,555.00
125,000 lb (56,699.1 kg)	21588	\$1,555.00

NTEP 1:10,000		
20,000 lb (9071.9 kg)	21592	\$635.00
25,000 lb (11,339.8 kg)	21593	\$635.00
40,000 lb (18,143.7 kg)	21608	\$760.00
50,000 lbSE* (22,679.6 kg)	26081	\$910.00
50,000 lbLE (22,679.6 kg)	21594	\$835.00
60,000 lb (27,215.5 kg)	21595	\$835.00
75,000 lb (34,019.4 kg)	21596	\$835.00
100,000 lb (45,359.4 kg)	21609	\$1,575.00
125,000 lb (56,699.1 kg)	21610	\$1,575.00

Non-NTEP		
10,000 lb (4535.9 kg)	17287	\$615.00

65058A ORDER INFORMATION

Load Rating	Part #	Suggested List Price
60' Cable		
75000 lb (34,019.4 kg)	39459	\$860.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 137) RL75058
Celtron	(see page 183) CLB
Tedea	(see page 311) 4158

WEIGH MODULE AVAILABLE

Model	Page #
2100 HE	20
TSA	72

* Howe-Richardson LOAD STAR 65058A-50K-1127