STANDARDS DIVISION

OTTAWA August 19, 1958.

RESTRICTED APPROVAL LISTING

PENNSYLVANIA PACKAGING AND CHECK WEIGHING SCALE

Under the provisions of the Weights and Measures Act, Chapter 292, R.S.C. 1952, and Regulations thereunder (P.C. 6894), the apparatus specified and illustrated herein has been listed as an approved device for restricted use and may be used in Camada in accordance with the conditions applicable.

Apparatus Listed: Single platform over and under scale, Model 300, Manufactured by the Pennsylvania Scale Company, P. O. Box 536, Lancaster, Pennsylvania, U. S. A., Office and Plant Bareville, Pennsylvania, U. S. A.

Rating of Apparatus: Capacities of 3 lbs., 5 lbs., 10 lbs., 15 lbs., 20 lbs. and 25 lbs.

Application: Weighing prepackaged goods and check weighing packages.

Conditions: As prescribed in P.C. 6894.

It should be noted that this device is not legal for direct over the counter sales to customers and is required to bear a permanently affixed plate bearing the words: "RESTRICTED-TRADE AND COLDERCE" or the mark - "RESTRICTED T & C".

Description: This device is an over and under single platform scale equipped with an unequal arm lever and a temperature compensated spring resistance. The required weight standard is placed on the platform, the chart indicator is adjusted by a knob on the front of the scale casing to read zero, the weight standard is removed and the package or packages to be weighed are substituted for the weight standard on the platform.

Bearings are V type agate and pivots are pear shaped hardened steel with round shanks pressed into the levers. A dash pot is provided with a pressure type locking device to prevent change in action.

Testing: The standard tests for a substitution type single pan over and under scale shall apply.


C. S. Phillips.

Assistant Director (WEN) Standards Division. R. W. MacLean

Director,

Standards Division.

Section de Mary Commande Section Commande Commande Section Commande Command	AND AND ADDRESS OF THE PARTY OF	The state of the s	

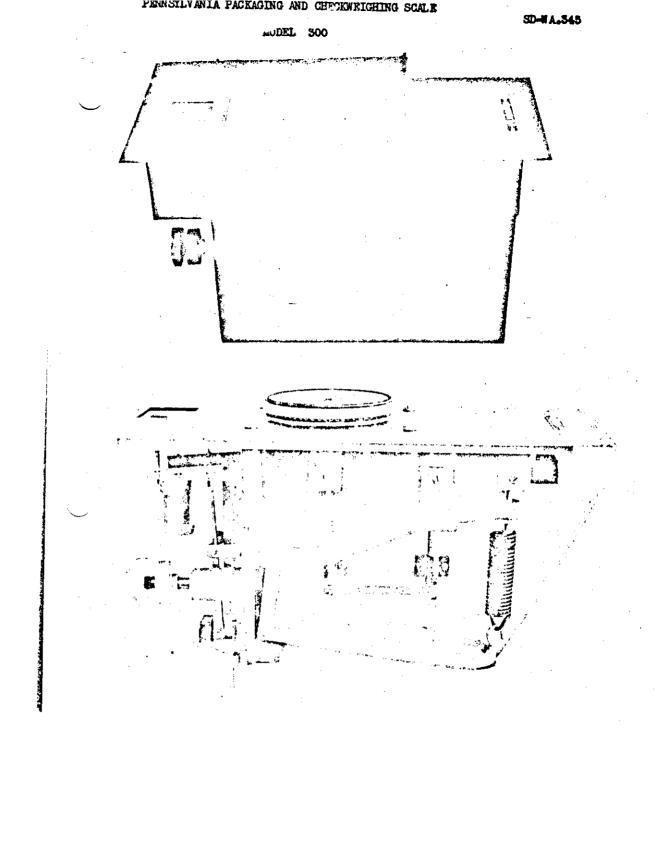

.